




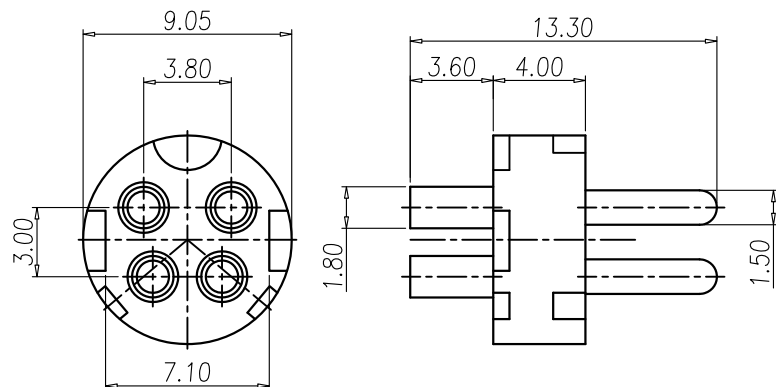

(HOUSING&PIN)

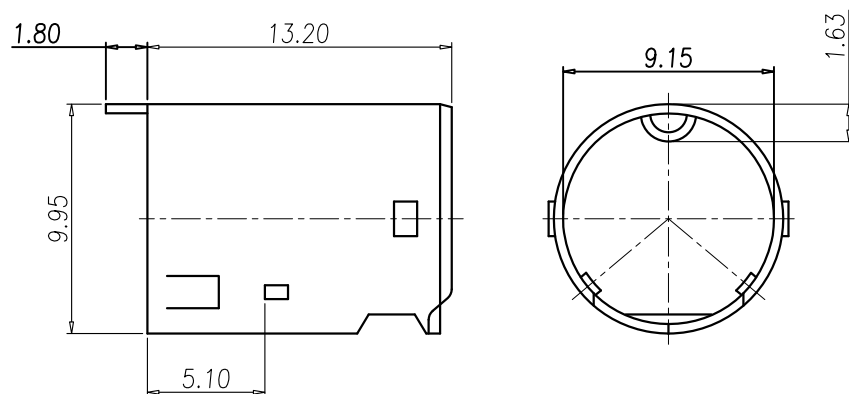

(SHELL)

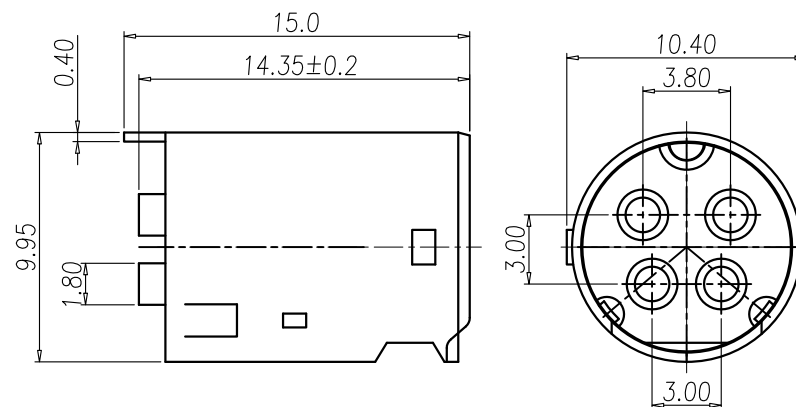

1. MATERIAL :

1-1. HOUSING : PBT UL94V-0 ; COLOR : BLACK

1-2. CONTACT : BRASS

1-3. SHELL : BRASS

2. FINISH :

2-1. CONTACT : 30 MICRO INCHES MIN. SILVER PLATED
UNDER PLATE : NICKEL

2-2. SHELL : NICKEL PLATED 50u" OVER ALL

3. ELECTRICAL SPECIFICATION :

3-1. Rated current : 7.5A

3-2. Rated voltage : 25V

4. Environmental :

4-1. Operation Temperature : -20℃~85℃

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.20
.XX ± 0.10
.XXX ± 0.05
ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

MDP-PM-04-LF
SERIES | LEADFREE
04 WAY
MOLDING
MALE

DESCRIPTION: POWER DIN 4PIN(M) MOLDING TYPE