

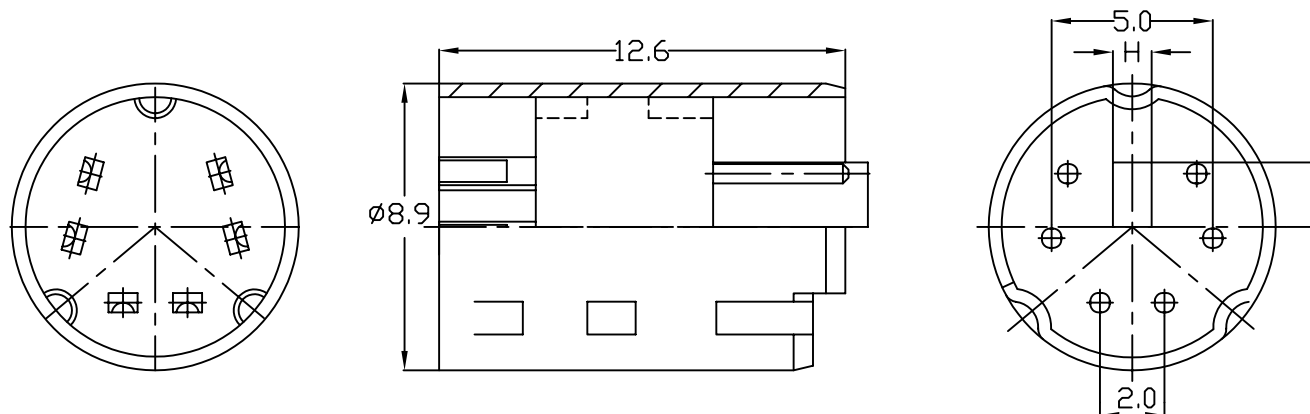


TABLE A

	MD 6P杯口(表金)(柱)1.8成品	表金 / GOLD FLASH	1.8	0.97±0.05
	MD 6P杯口(表金) 成品	表金 / GOLD FLASH	2.0	1.2
	MD 6P杯口(銀) 成品	銀 30u"/ SILVER 30u"	2.0	1.2
	MD 6P杯口(素) 成品		2.0	1.2
	MD 6P杯口(錫) 成品	錫 60u"/ TIN 60u"	2.0	1.2
P/N	DESCRIPTION	PLATING	L	H

備註 /NOTE:

1.安規 /SAFETY:

- 1-1.規格 /RATING: 100V AC MAX or 12V DC 2A MAX
- 1-2.絕緣阻抗 /INSULATION RESISTANCE: 50MΩ MIN at 250V DC
- 1-3.絕緣耐壓 /WITHSTANDING: 250V AC at 1 MINUTE

2.材質 /MATERIAL:

- 2-1.膠芯 /HOUSING: PBT (黑色 /BLACK)
- 2-2.針 /PIN: 黃銅 /BRASS
- 2-3.銅管 /SHELL: 黃銅 /BRASS

3.電鍍 /PLATING:

- 3-1.針 /PIN: SEE TABLE A
- 3-2.銅管 /SHELL: 鍍 30u" /SILVER 30u"

4.拉拔力 /STRENGTH:

- 4-1.退針拉力 /STRENGTH of UNLOAD PIN: 2.5kgf MIN

5.外觀 /SURFACE:

- 5-1.針 /PIN:
 - 5-1-1.不可缺針

- 5-1-2.不可斷針

- 5-1-3.不可歪針

- 5-1-4.不可壓傷變形

- 5-1-5.不可刮傷露銅

5-2.膠芯 /HOUSING:

- 5-2-1.不可有射出缺料或縮水現象

- 5-2-2.導柱不可容易斷裂

- 5-2-3.置入銅管內方向須正確

5-3.銅管(套) /SHELL:

- 5-3-1.刮痕不可過於明顯

- 5-3-2.不可壓傷變形

- 5-3-3.不可有電鍍花紋

- 5-3-4.不可刮傷露銅

- 5-3-5.不可撐開

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MDS-PS-06-LF
SERIES T T LEADFREE
06 WAY
SHORT TUBE
MALE

DESCRIPTION: