



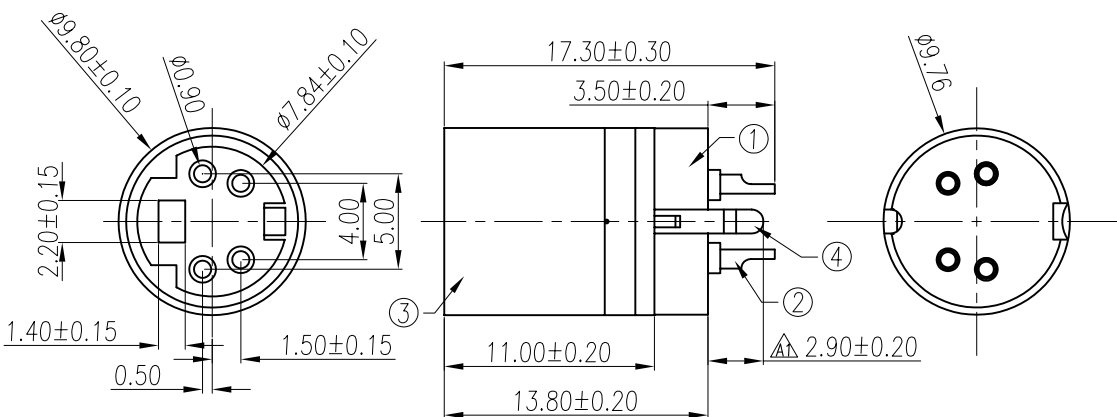

Note:

Specification:

1. Current rating: 1 A Max.
2. Dielectric withstanding voltage: 500 V(ac) for 1 minute.
3. Contact resistance: 30 mΩ Max.
4. Insulation resistance: 1000 MΩ Min at DC 500V.
5. Temperature range: $-55^{\circ}\text{C} \sim +105^{\circ}\text{C}$



NO.OF CONTACT	4	6	8
PART NO.	MDS-SE-04	MDS-SE-06	MDS-SE-08
POSITION			

4	Grounding Strip	1	Phosphor bronze	T=0.25mm	80u"min Nickel Plated
3	Shell	1	Brass	T=0.30mm	80u"min Nickel Plated
2	Contact	4~8	Brass	T=0.20mm	Contact area:0.8u"min Gold Plated over 40u"Nickel min. Solder area:80u"min Tin Plated over 40u"Nickel min.
1	Housing	1	PBT	UL 94-V0	Black/Green/Purple
No.	Name	Q'ty	Material	Remarks&Thickness	Finish

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MDS-SE-xx-LF
SERIES | T LEADFREE
04.06.08 WAY
EARTH WIRE
FEMALE

DESCRIPTION: MINI DIN SOLDER(F)地線