


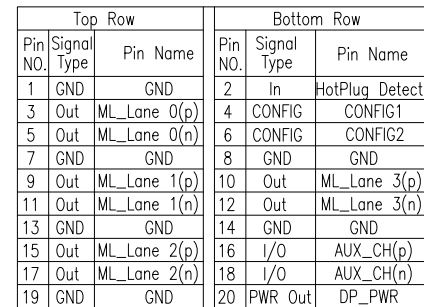


Shell: Brass;
Plating: Ni(50u" Min.) Plating .

Insertion Force: 4.5Kg Max
Withdrawal Force: 1.0~4.0Kg Min
Durability: 10000 Cycles

Current Rating: 0.5 Ampere per contact
Contact Resistance: 30 mΩ max.
Insulation Resistance: 100MΩ Min
Dielectric Withstanding Voltage: 500V AC Min

Operating Temperature: -40°C to $+85^{\circ}\text{C}$.



DESCRIPTION: Mini Displayport Receptacle DIP+SMT (JAE 3.2) No Mark