
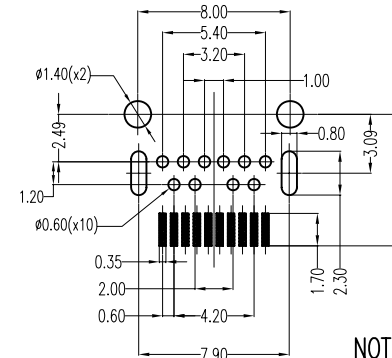




P.C.B LAYOUT (T=1.60mm)
VIEW BOTTOM (tolerance±0.05)

NOTES:






1. MATERIL

- 1.1 HOUSING: HI-TEMP PLASTIC (UL94-V-0), BLACK
- 1.2 CONTACT: COPPER ALLOY (T=0.20),
PLATING: GOLD PLATED ON CONTACT AREA,
TIN PLATED ON SOLDER TAILS, UNDER
NICKEL PLATED.

- 1.3 SHELL: BRASS (T=0.40), PLATING: NICKEL PLATED,
- 1.4 SPRING SHELL: STAINLESS SUS304 T=0.20mm
- 1.5 COVER: HI-TEMP, PLASTIC (UL94V-0) BLACK,

2. SPECIFICATION:

- 2.1 CURRENT RATING: 0.5 A
- 2.2 CONTACT RESISTANCE: 30m Ω MAX.
- 2.3 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC
R.M.S FOR ONE MINUTE.
- 2.4 INSULATION RESISTANCE: 100M Ω MIN AT 500V DC.
- 2.5 OPERATING TEMPERATURE: -25. $^{\circ}$ C TO +85. $^{\circ}$ C
- 2.6 DURABILITY: 10000 CYCLES.
- 2.7 MATING FORCE: 4.5KG MAX.
- 2.8 UNMATING FORCE: 1.0KG MIN

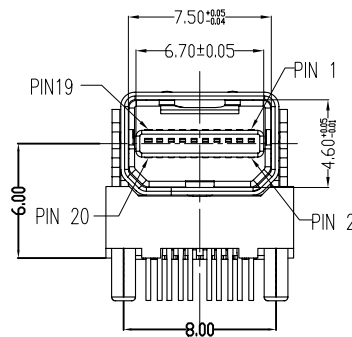

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE


SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$ 0.38
.XX $\pm$ 0.25
.XXX $\pm$ 0.10
ANG $\pm$

照片框

ORDER INFORMATION

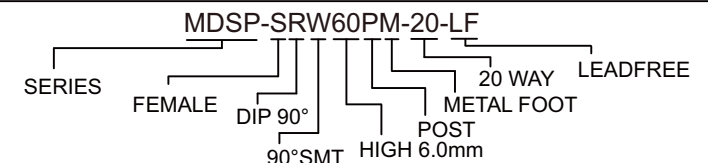

DESCRIPTION: MINI DISPLAY PORT 母20P SMT式(中心高6.0)