


包装方式：单PCS理线，50PCS每袋。
在依照外箱大小装入防水袋。

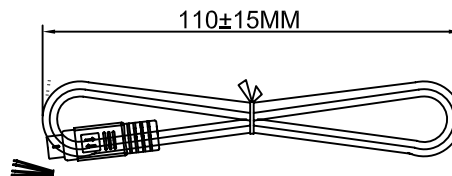

Note:

- 1.100% OPEN SHORT & MISWIRE TEST.
- 2.CONDUCTIVE RESISTANCE:5Ω/MAX.
- 3.INSULATION RESISTANCE:10MΩ/MIN.
- 4.HI-POT TEST:AT DC 300V.
- 5.所有材料需符合RoHs标准.

PIN OUT

P1		P2
OPEN	RED	1
OPEN	WHITE	2
OPEN	GREEN	3
OPEN	BLACK	4

PART LIST:本产品均符合"ROHS"环保标准.所用材料符合ROHS.

3	OUTER MOLD:PVC 45P BLACK .		KG/K
2	MINI DIN 4PIN MALE 黑色胶芯 镀镍.	1	SET
1	CABLE:NO UL 22AWG*4C OD:5.0mm±0.15MM COLOR:BLACK. L=1820MM	1	PCS
ITEM	STANDARD SPECIFICATION	Q' TY	UNIT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

P PROJECTION

照片框

ORDER INFORMATION

MDX1-040022-M6F-LF

SERIES

LEADFREE

1820mm

MALE

22 AWG

04 WAY

DESCRIPTION: MINI DIN 4PIN M TO OPEN CABLE BLACK L=1820MM