


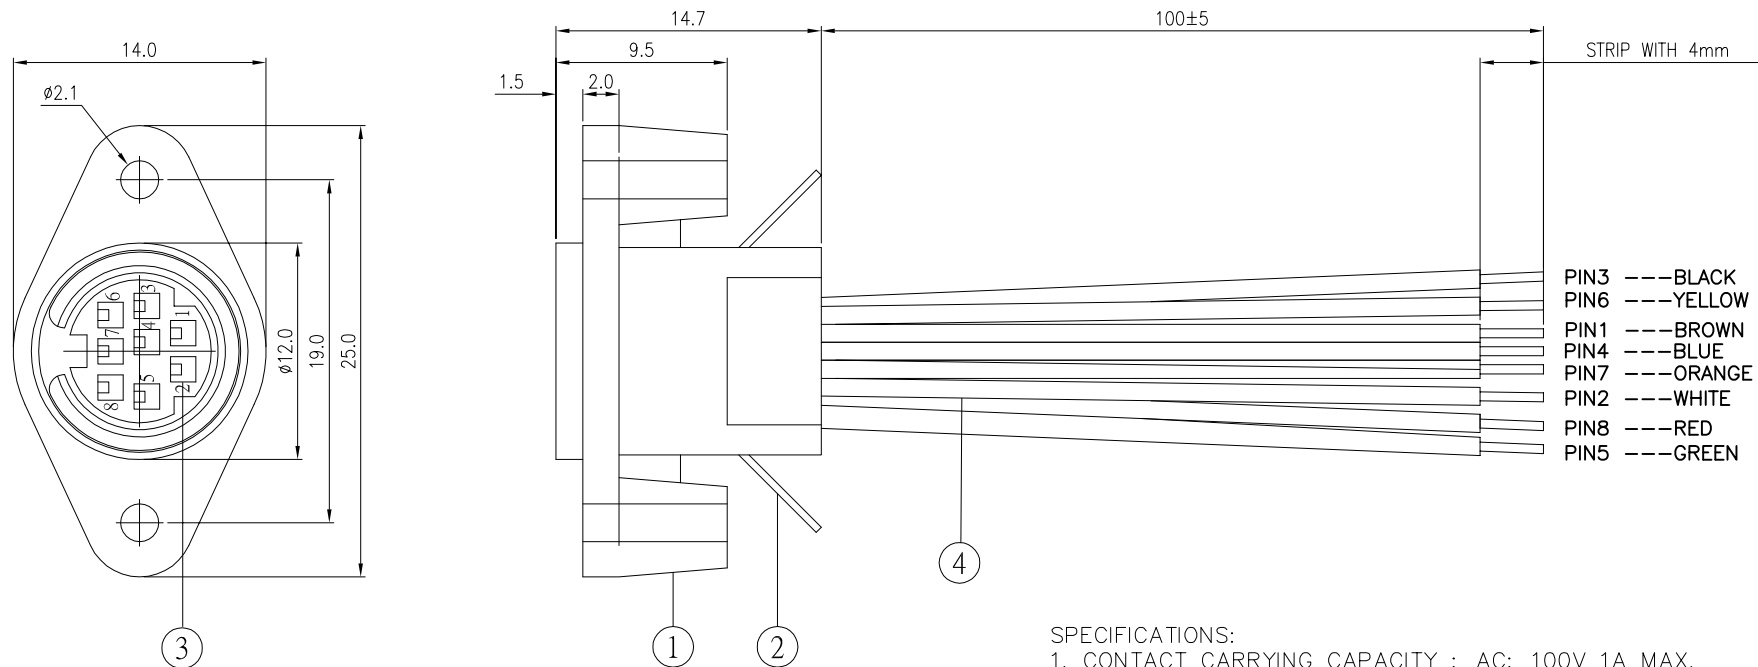

SPECIFICATIONS:

- CONTACT CARRYING CAPACITY : AC: 100V 1A MAX.
DC: 12V 2A MAX.
 - CONTACT RESISTANCE : 30m OHM MAX.
 - INSULATION RESISTANCE : 50M OHM MIN. AT DC 250V
 - VOLTAGE WITHSTAND : AC 250V FOR ONE MINUTE.
 - INSERTION FORCE : 1.0 – 4.5KG
WITHDRAWAL FORCE : 0.8 – 3.0KG
 - WIRES ARE CONNECTED WITH THE CONTACTS BY CRIMPING.
- ***** WIRE LENGTH AND COLOR CAN BE CHANGED AS CUSTOMER'S REQUEST.
THE HOLDING FORCE BETWEEN HOUSING TAB AND TERMINAL 1.2KGS MIN.

ARRANGEMENT OF CONTACTS						
No. of Contacts	3	4	5	6	7	8
MODEL NO.						
WIRE COLOR	1 Black 2 Green 3 Orange 4 ---- 5 ---- 6 ---- 7 ---- 8 ----	1 Black 2 Green 3 Yellow 4 Red 5 ---- 6 ---- 7 ---- 8 ----	1 Brown 2 Black 3 Green 4 Yellow 5 Red 6 ---- 7 ---- 8 ----	1 Brown 2 White 3 Black 4 Green 5 Yellow 6 Red 7 ---- 8 ----	1 Brown 2 White 3 Black 4 Green 5 Yellow 6 Orange 7 Red 8 ----	1 Brown 2 White 3 Black 4 Blue 5 Green 6 Yellow 7 Orange 8 Red

4	WIRE	3 To 8	AWG # 26		
3	CONTACT TERMINAL	3 To 8	PBR-H 0.2T	SILVER PLATED	N/A
2	EARTH TERMINAL	1	BSR-H 0.4T	TIN PLATED	N/A
1	BODY	1	P.B.T	BLACK	UL94V-0
P/N	PART NAME	Q'TY	MATERIAL	PLATING&COLOR	REMARKS

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50

.X ± 0.30

.XX ± 0.20

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MDX1-xx0026PE-F10C-LF

SERIES

100mm

LEADFREE

FEMALE

26 AWG

03-08 WAY

PANEL

DESCRIPTION: