

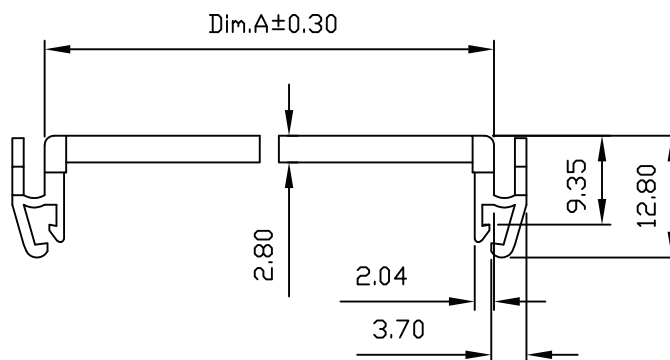




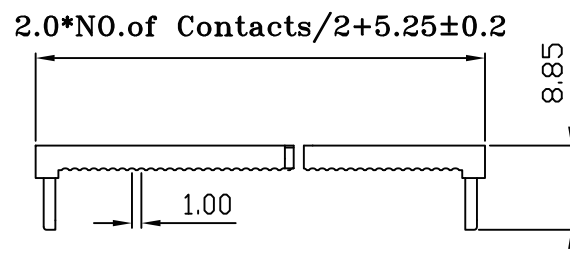


MATERIALS:
INSULATOR:P.B.T.30%GLASS FIBER,UL94V-0
NSR:P.C. 0%GLASS FIBER,UL94V-2
CONTACT MATERIAL:BRASS OR PHOSPHOR BRONZE,
 GOLD FLASH OVER NICKEL



ELECTRICAL:
CURRENT RATING:1AMP.
INSULATION RESISTANCE:1000M Ω MIN.
DIELECTRIC WITHSTANDING:500VAC
OPERATING TEMPERATURE:-45°C~+85°C



DIMENSION			
CONTACT	Dim.A	CONTACT	Dim.A
10 pin	15.40	30 pin	35.40
14 pin	19.40	40 pin	45.40
16 pin	21.40	44 pin	49.40
20 pin	25.40		

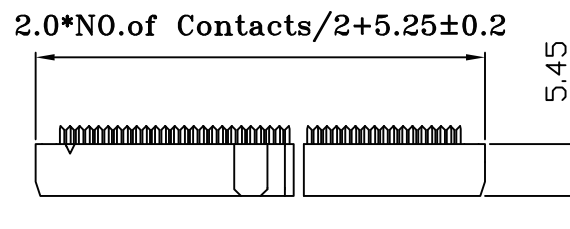

2.0*N0.of contacts/2-2.0±0.1

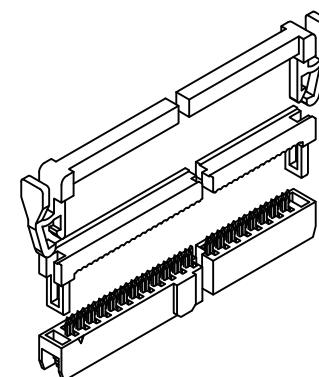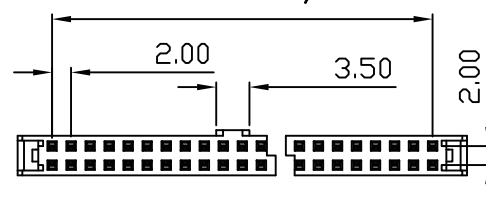

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X. ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ± 0.10
 ANG ±



ORDER INFORMATION

MF-C3L-xx-LF
 SERIES LEADFREE
 10~44WAY
 SR / LOCK
 THREE TYPE

DESCRIPTION: