
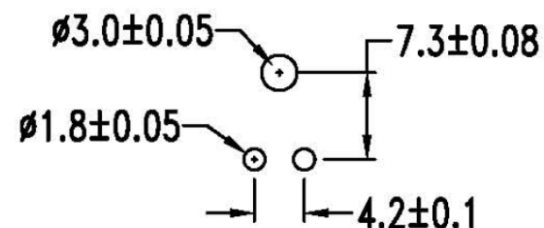






Features:

- Material: UL 94V-2 nylon
- .045"(1.14mm) square pin
- Recommended PCB thickness: .070"(1.78mm) Max.

Specification:

- Current rating: 9A (Used with #16 AWG)
- Voltage rating: 600V (R.M.S.)
- Contact resistance: 10mΩ Max.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -40°C ~ 105°C



P.C.B. hole dimensions

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

MF-PRE-1X02-LF
SERIES EAR 02 WAY LEADFREE
DIP 90°
MALE

DESCRIPTION: