

Features:


- 2 ~ 24 circuits available
- Material: UL 94V-0
- Positive housing locks
- 600V volts rating
- Current rating up to 9 amperes per circuits
- 10 milliohms contact resistance
- Mates with series housing
- Recommended PCB thickness: .07"(1.78mm) max.

Specifications:

- Voltage rating: 600V AC, DC (R.M.S.)
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -40 °C ~ 105 °C
(including temperature rise)

Ordering and Dimensional Information (mm)

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2		5.4	14	25.2	30.6
4	4.2	9.6	16	29.4	34.8
6	8.4	13.8	18	33.6	39.0
8	12.6	18.0	20	37.8	43.2
10	16.8	22.2	22	42.0	47.4
12	21.0	26.4	24	46.2	51.6

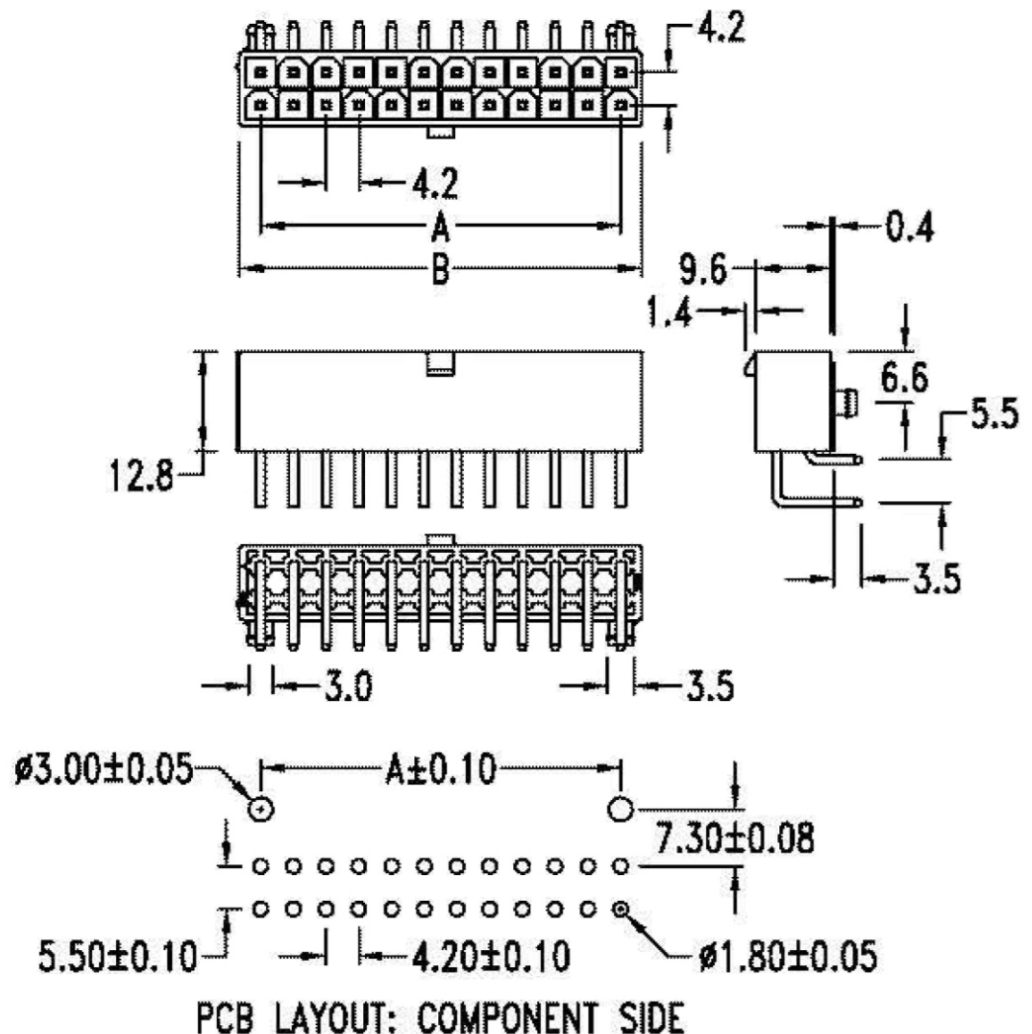

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PJECTION

TOLERANCES ARE

X. \pm

.X \pm

.XX \pm

.XXX \pm

ANG \pm

照片框

ORDER INFORMATION

MF-PRPV0-2Xxx-LF
SERIES | LEADFREE
MALE | 94V-0
POST | 2X01:02WAY
DIP 90° | 2X12:24WAY

DESCRIPTION: