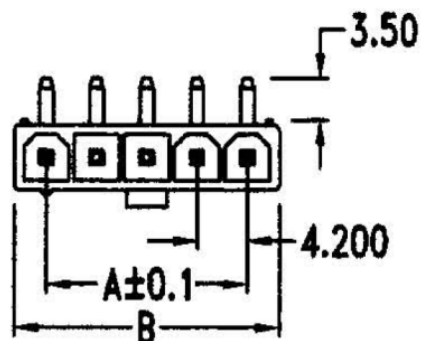


Features:

- 2 ~ 12 circuits available
- Material: UL 94V-2 nylon
- .044"(1.11mm) square pin
- Recommended PCB thickness: .070"(1.78mm) Max.

Specification:

- Current rating: (Used with #16 AWG)

Circuits	2 ~ 3	4 ~ 6	7 ~ 10	11 ~ 12
Ampere	9	8	7	6

- Voltage rating: 600V (R.M.S.)
- Contact resistance: 10mΩ Max.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -40°C ~ 105°C

Dimensional Information (mm)

Circuits	Dim. A	Dim. B	Dim. C
2	4.2	9.6	13.2
3	8.4	13.8	17.4
4	12.6	18.0	21.6
5	16.8	22.2	25.8
6	21.0	26.4	30.0
7	25.2	30.6	34.2
8	29.4	34.8	38.4
9	33.6	39.0	42.6
10	37.8	43.2	46.8
11	42.0	47.4	51.0
12	46.2	51.6	55.2

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.40
.XX ± 0.25
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

MF-PRX-1Xxx-LF
SERIES
MALE
NON POST
DIP 90°
LEADFREE
1X02:02 WAY
1X12:12 WAY

DESCRIPTION: