
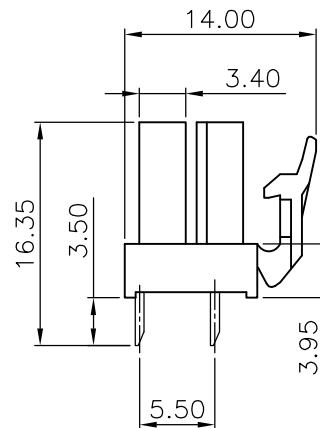
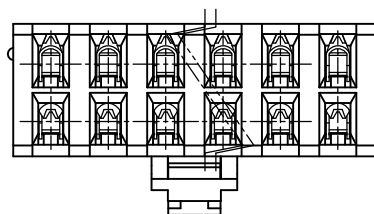
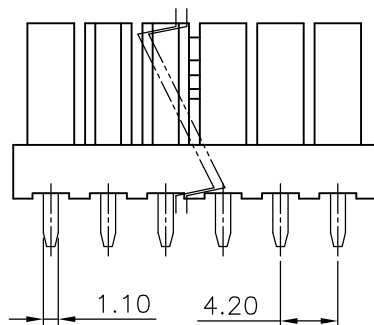
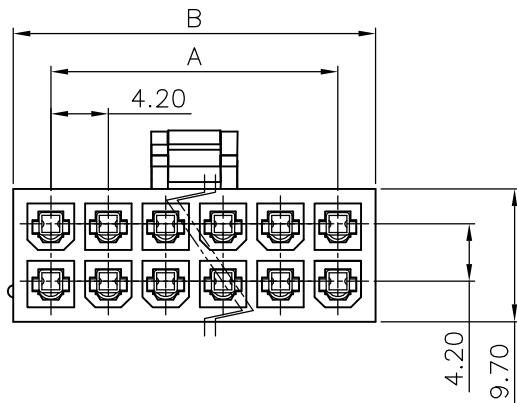
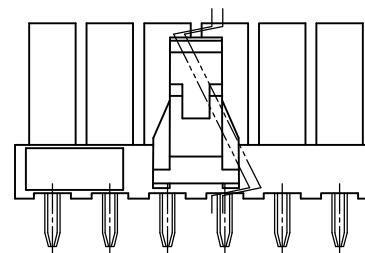


RECOMMENDED PCB LAYOUT

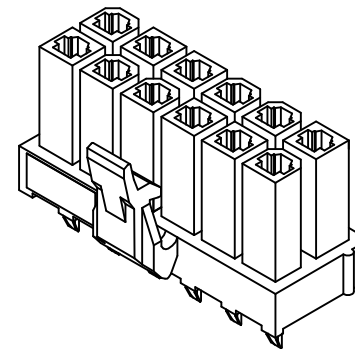

NOTE :

- * Material : Nylon UL 94V-0 or UL 94V-2
- * Standard color : White
- * Finish : Plated Tin over Nickel
- * Electrical rating : TUV 250V 7A , AC/DC
- * 4-24 circuits available

Circuits	Part No.	Dim. A	Dim. B	Circuits	Part No.	Dim. A	Dim. B
2	MF-SDL-2X01	---	5.5	22	MF-SDL-2X11	42.00	47.5
4	MF-SDL-2X02	4.20	9.7	24	MF-SDL-2X12	46.20	51.7
6	MF-SDL-2X03	8.40	13.9	26	MF-SDL-2X13	50.40	55.9
8	MF-SDL-2X04	12.60	18.1	28	MF-SDL-2X14	54.60	60.1
10	MF-SDL-2X05	16.80	22.3	30	MF-SDL-2X15	58.80	64.3
12	MF-SDL-2X06	21.00	26.5	32	MF-SDL-2X16	63.00	68.5
14	MF-SDL-2X07	25.20	30.7	34	MF-SDL-2X17	67.20	72.7
16	MF-SDL-2X08	29.40	34.9	36	MF-SDL-2X18	71.40	76.9
18	MF-SDL-2X09	33.60	39.1	38	MF-SDL-2X19	75.60	81.1
20	MF-SDL-2X10	37.80	43.3	40	MF-SDL-2X20	79.80	85.3

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MF-SDL-2Xxx-LF
SERIES LEADFREE
2X01:02WAY
2X20:40WAY
LOCK
DIP 180°
FEMALE

DESCRIPTION: