

Features:



- 3 circuits available

Specification:

- Current rating and wire size:

Wire Size AWG	Circuits	
	2, 3	4 ~ 6
# 16	9 A	8 A
# 18	9 A	8 A
# 20	7 A	6 A
# 22	5 A	4 A
# 24	4 A	3 A
# 26	3 A	2 A
# 28	2 A	1 A

- Voltage rating: 600V (R.M.S.)
- Insulation resistance: DC 500V 1000M Ω min.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -40°C ~ 105°C
(including temperature rise)

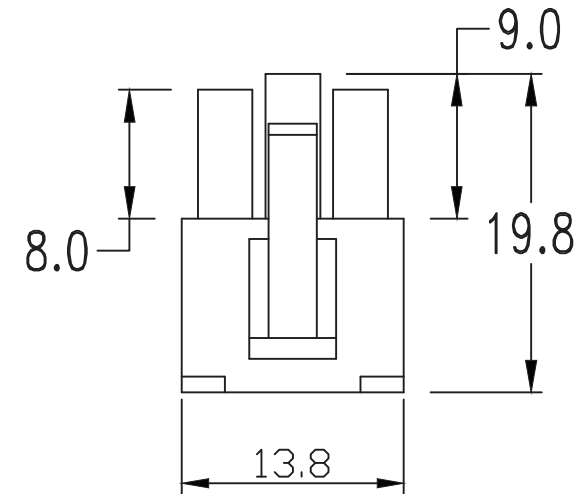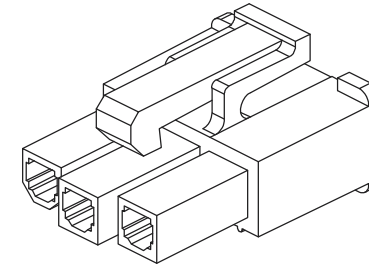

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X, $\pm$
.X $\pm$ 0.40
.XX $\pm$ 0.25
.XXX $\pm$ 0.08
ANG $\pm$

照片框

ORDER INFORMATION

MF-SH-1X03-LF
SERIES HOUSING FEMALE
03 WAY
LEADFREE

DESCRIPTION: