
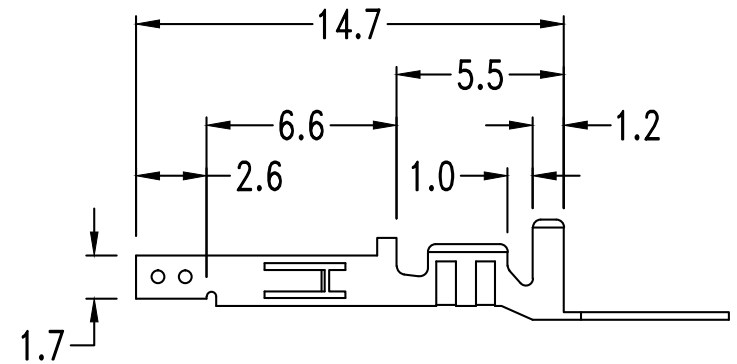
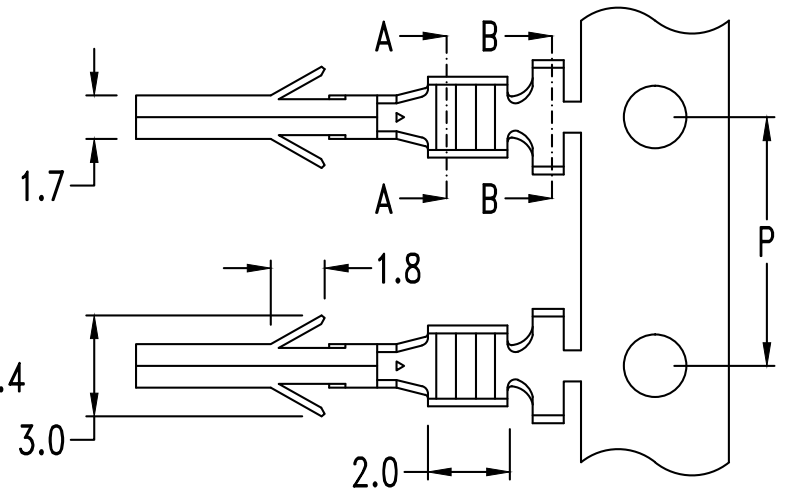



Features:

- 600V volts rating (R.M.S.)
- Thickness: 0.2mm

Specifications:

- Voltage rating: 600V AC, DC
- Current rating up to 9A(with #18 AWG)
- Dielectric withstanding Voltage: 1500V AC/minute
- Contact resistance: Initial value/10mΩ max.
After environmental testing/20mΩ max.
- Crimp resistance: 5mΩ max,
- Terminal retention force: 3.0Kg min.
- Ambient temperature range: -40°C ~ 105°C
(including temperature rise)



Ordering & Dimensional Information (mm)

Part No.	Dimension				Wire Size (AWG)	Material	Finished
	a	b	c	d			
MFB-FT-22	2.3	2.3	1.65	1.8	#22 ~ #28	Brass	Tin-plated
MFB-FT-18	4.5	3.6	2.3	1.9	#18 ~ #24		
MFB-FT-16			2.8	2.4	#16		

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PJECTION

X. ±
.X ± 0.40
.XX ± 0.25
.XXX ± 0.08
ANG ±

照片框

ORDER INFORMATION

MFB-FT-xx-LF
SERIES | LEADFREE
22:22~28AWG
18:18~24AWG
16:16 AWG
TIN
FEMALE

DESCRIPTION: