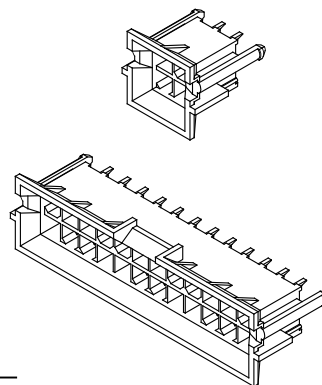
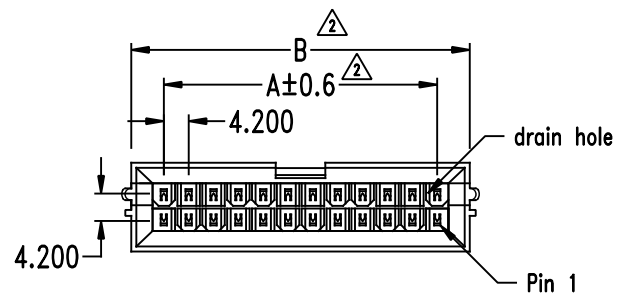


Recommended hole layout for .070"(1.78mm) Max. thickness P. C. board

Dimensional Information (mm)

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
4	4.2	15.5	12	21.0	32.4	20	37.8	49.5
6	8.4	19.7	14	25.2	36.6	22	42.0	53.7
8	12.6	23.9	16	29.4	41.0	24	46.2	57.9
10	16.8	28.2	18	33.6	45.2			

Features:

- △ 4 ~ 24 circuits available
- Pin material: Brass
- △ Finished: Tin-plated 100u" over nickel 30u"
- Material: UL 94V-0 nylon 66

Specification:

- Voltage rating: 600V AC, DC (R.M.S.)
- Current rating and wire size:

Maximum current rating (Amperes)			
Ckt Size Ampere Wire	4, 6	8, 10	12~24
AWG #16	8	7	6
AWG #18	6	5	4
AWG #20	5	4	4
AWG #22	4	4	4
AWG #24	3	3	3
AWG #26	1	1	1
AWG #28	1	1	1

- Insulation resistance: DC 500V 1000M Ω Min.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -40°C ~ 105°C
(including temperatute rise)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$ 0.40
.XX $\pm$ 0.25
.XXX $\pm$ 0.08
ANG $\pm$

照片框

ORDER INFORMATION

MFB-PDP-2Xxx-LF
SERIES
MALE
LEADFREE
2X02:04WAY
2X12:24WAY
POST
DIP 180°

DESCRIPTION: