

- 2 ~ 24 circuits available
- Material: PA66 94V-0
- Tin-plated brass pin / Gold plated

Specification:

- Current rating:

Circuits	2	4, 6	8, 10	12~24
Ampere	9 A	8 A	7 A	6 A

- Voltage rating: 600V (R.M.S.)
- Contact resistance: 10mΩ Max.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -40°C ~ 105°C


Dimensional Information (mm)

Circuits	Dim. A	Dim. B	Dim. C
N	$4.2 \times (N/2 - 1)$	$A + 5.4$	$4.2 \times (N/2 - 1) + 9.4$

&& N = 2 ~ 24

NOTES:

- 1) phantom lines indicate areas where thrminal standoffs contact p.c. board. no exposed traces or vias allowed near these areas.

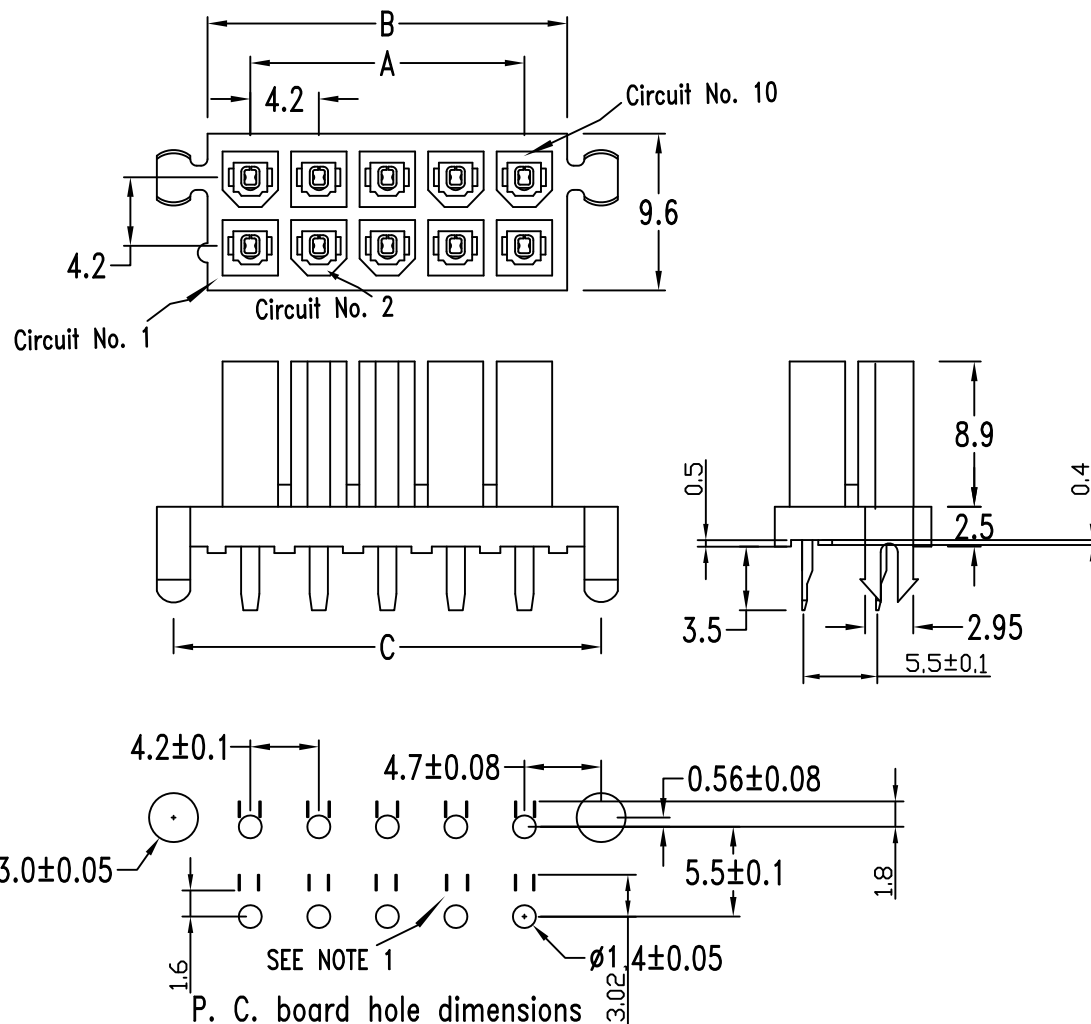

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.40
.XX ± 0.25
.XXX ± 0.08
ANG ±

照片框

ORDER INFORMATION

MFB-SDP-2Xxx-LF
SERIES 2X01:02WAY LEADFREE
2X12:24WAY
POST
DIP 180°
FEMALE

DESCRIPTION: