


PIN ASSIGNMENT

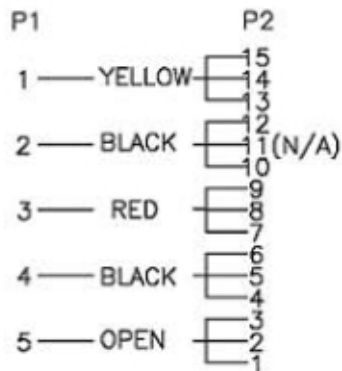

ELECTRONIC TEST:

1. ALL CABLE 100% TEST, OPEN, SHORT, MISS WIRE
2. RESISTANCE: 2 ohm max
3. I. RESISTANCE: 10M ohm min
4. HI-POT: 500V DC/10ms

8	SATA15P LATCH	S-ATA-15P LATCH	1	Pc
7	TERMINAL	CONTACT NI FLASH FEMALE	4	Pcs
6	HOUSING	MINIFIT 1*5P PH:4.2mm MALE, WHITE	1	Pc
5	HOOK UP WIRE	UL1007 18AWG YELLOW L=145mm	1	Pc
4	HOOK UP WIRE	UL1007 18AWG BLACK L=145mm	2	Pcs
3	HOOK UP WIRE	UL1007 18AWG RED L=145mm	1	PC
2	SATA 刺破式连接器	SATA 15P 刺破式连接器 白色	1	PC
1	SATA CONN	S-ATA-15P ,BLACK G/F 刺破式	1	PC
NO.	PART NO.	DESCRIPTION	Q'TY	UNIT

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

X.±

CHECKED BY GENIUS

.X±

UNIT / mm

SCALE 1:1

.XXX±

DATE

ANG±

煜倫股份有限公司

www.morethanall.com

SIZE A4

P PROJECTION

照片框

ORDER INFORMATION

MFSA-051518-F13C-LF

SERIES

LEADFREE

130mm

FEMALE TO FEMALE

18 AWG

05 TO 15 WAY

DESCRIPTION: