


Material: \*Insulator: PBT UL 94V-0 With G.F (White)  
 \*Contact: Phosphor Bronze, Finish Tin Plated.

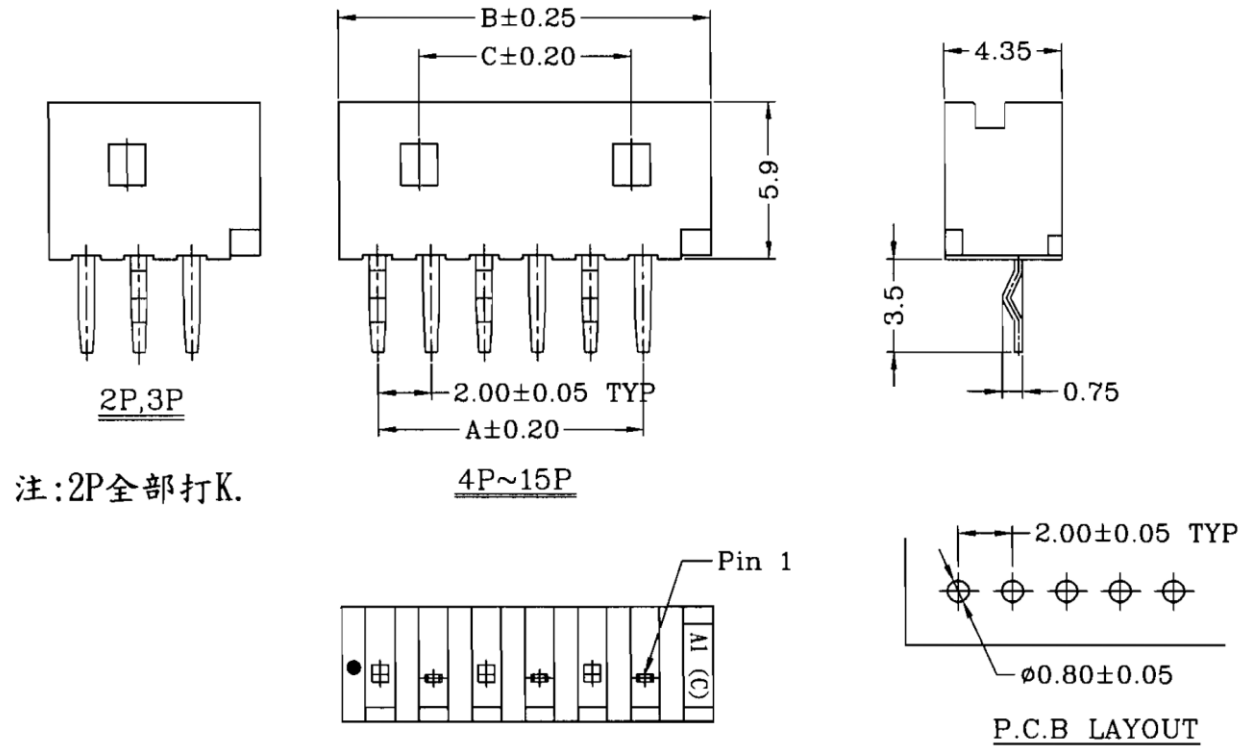

2P,3P

注:2P全部打K.

4P~15P

#### Dimensional & Ordering Information:

| Circuits | Dimensions |       |       | Pcs/Bag |
|----------|------------|-------|-------|---------|
|          | A          | B     | C     |         |
| 2        | —          | 6.00  | —     | 1000    |
| 3        | 4.00       | 8.00  | —     | 1000    |
| 4        | 6.00       | 10.00 | 4.00  | 1000    |
| 5        | 8.00       | 12.00 | 6.00  | 1000    |
| 6        | 10.00      | 14.00 | 8.00  | 1000    |
| 7        | 12.00      | 16.00 | 10.00 | 1000    |
| 8        | 14.00      | 18.00 | 12.00 | 500     |
| 9        | 16.00      | 20.00 | 14.00 | 500     |
| 10       | 18.00      | 22.00 | 16.00 | 500     |
| 11       | 20.00      | 24.00 | 18.00 | 500     |
| 12       | 22.00      | 26.00 | 20.00 | 500     |
| 13       | 24.00      | 28.00 | 22.00 | 500     |
| 14       | 26.00      | 30.00 | 24.00 | 500     |
| 15       | 28.00      | 32.00 | 26.00 | 500     |

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±  
X ± 0.25  
.XX ± 0.15  
.XXX ± 0.08  
ANG ±

照片框

#### ORDER INFORMATION

MH-D-xx-LF  
SERIES | LEADFREE  
02~15 WAY  
DIP 180°

DESCRIPTION: