
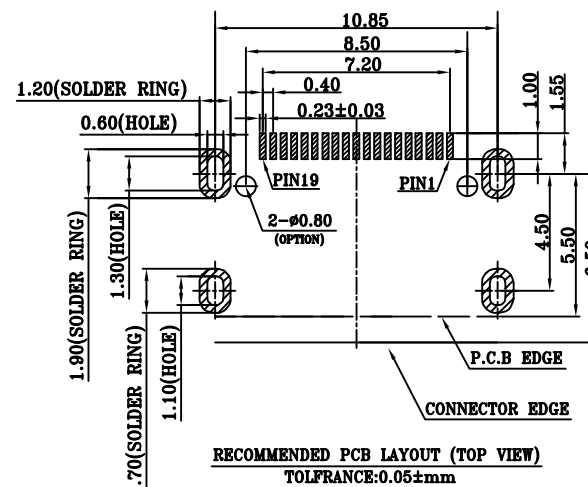

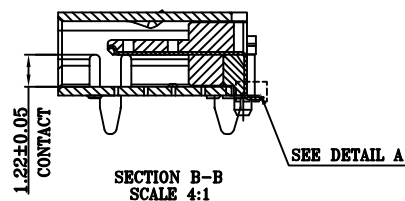
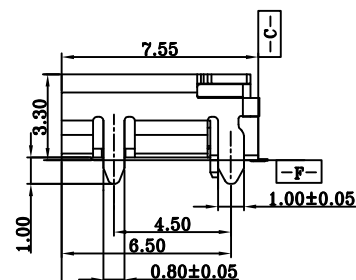
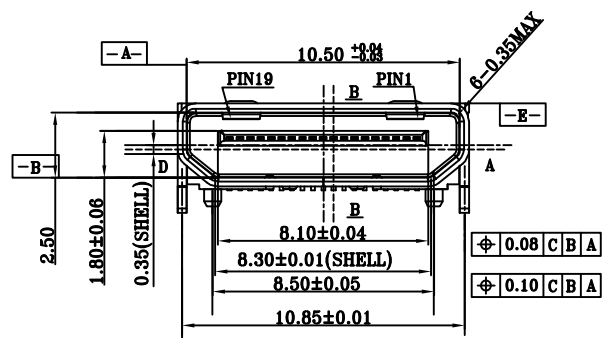



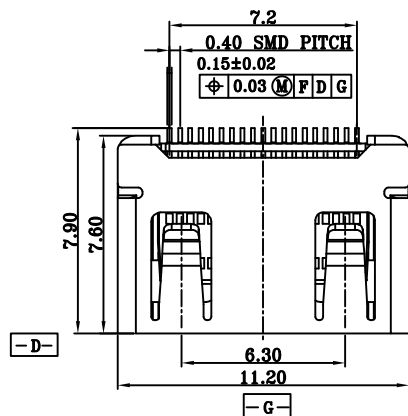

NOTE:

1.MATERIAL:

HOUSING : LCP (E130I) +30%G.F. (UL94V-0) , BLACK
 TERMINAL : PHOSPHOR BRONZE C5191-H (HV190-210) , T=0.10±0.01MM.
 SHELL : PHOSPHOR BRONZE C2680-H (HV190V-210) , T=0.35±0.02MM.
 BACK HOUSING : LCP (E130I) +30%G.F. (UL94V-0) , BLACK.

2.PLATED

TERMINAL : SELECTIVE AU NO CONTACT AREA (SEE LRDER INFORMATION) .
 100U" MIN. SN ON SOLDER TAIL AREA ,
 BOTH OVER 50U" MIN. NI UNDERPLATED OVER ALL.

SHELL:SEE ORDER INFORMATION

3.MECHANICAL CHARACTERISTICS

INSERTION FORCE : 4.5KGF MAX

WITHDRAWING FORCE : 0.715-2.55KGF

CONTACT RETENTION FORCE : 0.3KGF/PIN MIN.

4.IMPORTANT CONTROL DIMINTIONS : 12

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

照片框

ORDER INFORMATION

MHDMI-SWMMP85-19-LF

SERIES

FEMALE

LEADFREE

19WAY

POST 8.5mm

METAL FOOT

90°SMT

DESCRIPTION: