

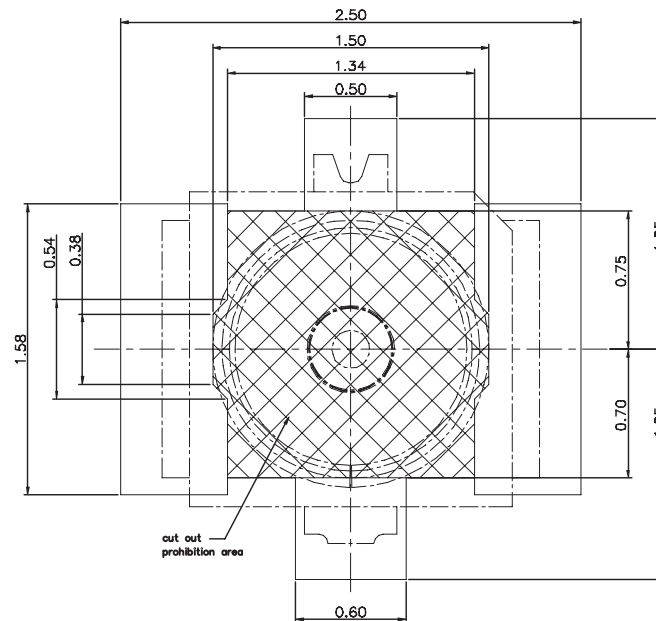
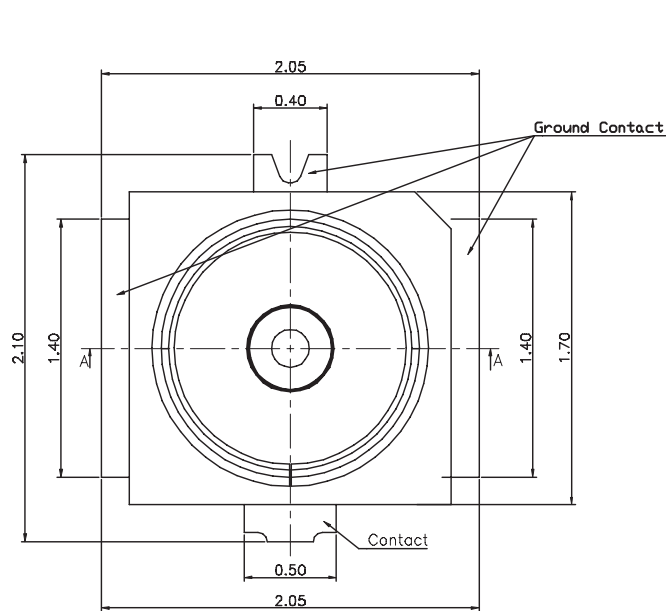


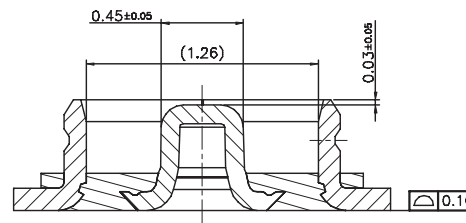

Recommended PCB Layout
(General Tolerance Is ± 0.05)

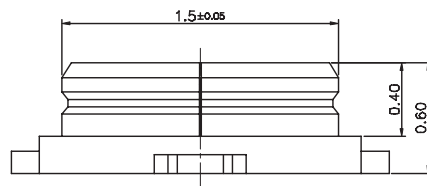

SECTION: A-A

NITE:

1.MATERIAL:

1.1. HOUSING: THERMOPLASTIC, ODDOR:
BLACK, UL 94V-0;

1.2. CONTACT: COPPER
ALLOY, T=0.10mm;

1.3. SHELL: COPPER
ALLOY, T=0.12mm.

2.FINISH:

2.1. CONTACT: 0.0762um GOLD
PLATED ON MATING AREA, GOLD FLASH
ON SOLDER TAILS, NICKEL UNDER
PLATED OVER OF THE ALL;

2.2. SHELL: GOLD FLASH ON THE
ALL, NICKEL PLATED UNDER.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm

SCALE 1:1

DATE

SIZE A4

PROJECTION

X. ± 0.30

.X ± 0.25

.XX ± 0.20

.XXX ± 0.10

ANG $\pm$

照片框

ORDER INFORMATION

MHF4-JV-50-LF

SERIES

JACK

180° SMT

50 OHM

LEADFREE

DESCRIPTION: RF第四代板端成品