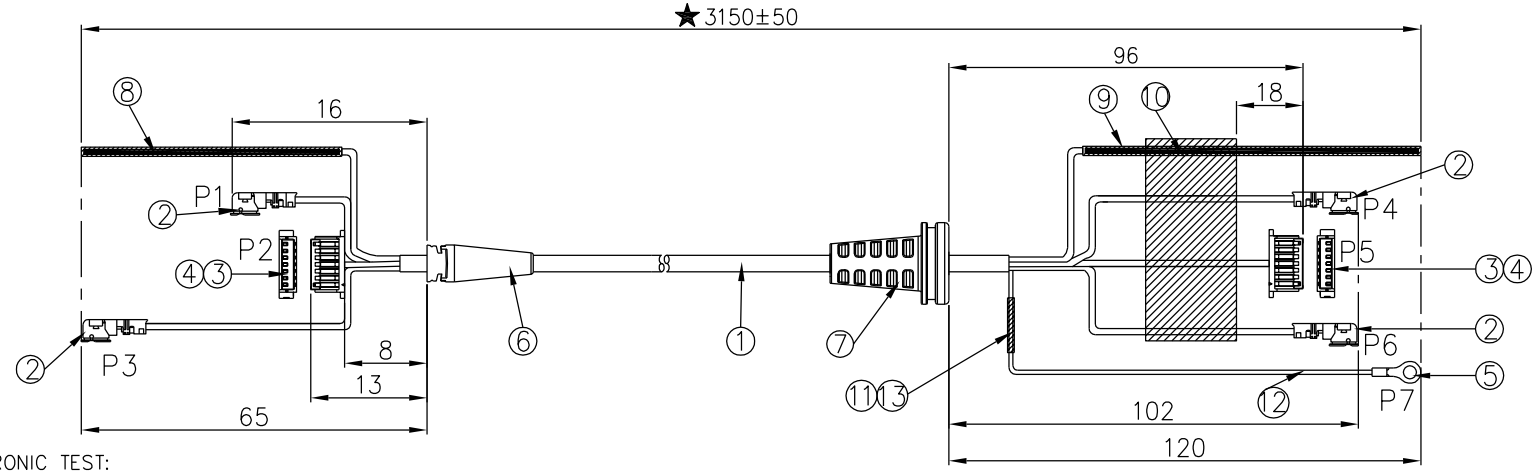

ELECTRONIC TEST:
1.Voltage:DC 300V 5M ohm/10s.
2.Contact resistance:3.0 ohm MAX.
3.100% Open,Short,Mis-Wire Testing.

MEET RoHS & Lead free

ITEM	Q'TY	P/N	DESCRIPTION
15	1/2000		HOUSING:7P P=1mm SAMTEC P/N:ISS1-07 测试头
14	1/2000		COAXIAL CONN:I-PEX MHF Micro 测试头
13	0.2g	AN00000227	無鉛錫絲: ø1.0mm MEET RoHS & Lead free
12	1		WIRE:ULXX 28# L=120mm MEET RoHS & Lead free
11	1		H.S TUBE:ø2.0x10mm BLACK MEET RoHS & Lead free
10	1		H.S TUBE:ø6.0x16mm BLACK MEET RoHS & Lead free
9	1		H.S TUBE:ø2.0x90mm BLACK(双臂热缩管) MEET RoHS & Lead free
8	1		H.S TUBE:ø2.0x57mm BLACK(双臂热缩管) MEET RoHS & Lead free
7	3g		PU料 P/N:MEC0328A MEET RoHS & Lead free
6	1		c-FLOW3310-P:SENSOR LONG STRAIN RELIEF FOR PROBE P/N:MEC MEET RoHS & Lead free
5	1		RING TERMINAL TE 31428 MEET RoHS & Lead free
4	14		TERMINAL:Phosphor Bronze P/N:CC09M-01-GF MEET RoHS & Lead free
3	2		HOUSING:7P P=1mm SAMTEC P/N:ISS1-07 MEET RoHS & Lead free
2	4		COAXIAL CONN:I-PEX MHF Micro Viatte MEET RoHS & Lead free
1	1		CABLE:ULXX 36#COAX*2C+30#*6C+28#*1C+SHIELD+FURCATION TUBING +PULL STRING L=3150mm MEET RoHS & Lead free

Pin Assignment

CONNECTOR	COLOR	AWG
P3	LOW V COAX	36
P4	HIGH V COAX	36
P6	LOW V COAX	36
P1	HIGH V COAX	36

Pin Assignment

P7	COLOR	SIGNAL	AWG
1	RED	SHIELD	28

Pin Assignment

P2	COLOR	SIGNAL	AWG	P5
1	RED	+5V	30	1
2	BROWN	-5V	30	2
3	GREEN	GND2	30	3
4	BLACK	GND	30	4
5	WHITE	LED1	30	5
6	BLUE	LED2	30	6
7	GRAY	HV	28	7

RoHS Compliant

MORETHANALL PCB CONNECTORS Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY	TOLERANCES ARE
CHECKED BY GENIUS	X. ± .X ± .XX ± .XXX ± ANG ±
UNIT / mm SCALE 1 : 1	
DATE	
SIZE A4 PPOJECTION	

照片框

ORDER INFORMATION

MHFSHX33-01R072836-F124N
SERIES
R/A
07PIN
28,36 AWG
FEMALE
3150mm

DESCRIPTION: ***CABLE c-FLOW3310 APD SENSOR WITH FIBER***