


Pin Out

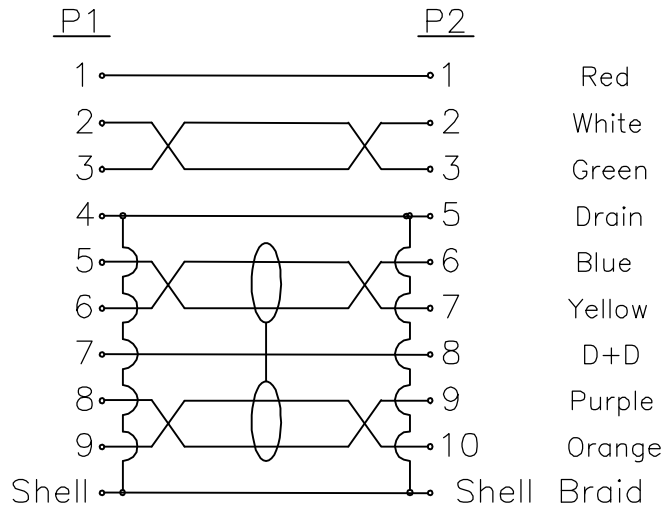

2.Note

FQC/OQC CHARACTERISTICS FOR EVALUATION: "#1,#2,#3" MEASURE

3.All Materials Shall Comply With RoHS

4.Specification

100% Open & Short Test

Contact Resistance: 3 ohm Max

Insulation Resistance: 5 Mega ohm Min
300 V DC/10 ms

Item	Name	Description	Q'TY	Unit
1	Wire	UL 20276(1P×28#+D+AL+Mylar)×2+1P×30#++ 1C×26#+AL+D+B PVC BLACK JACKET,OD:5.5±0.15 mm	A/R	mm
2	Conn	USB 3.1 AM/BLUE INSULATOR SOLDER TYPE	1	PCS
3	Conn	USB 3.1 MICRO B/M BLACK INSULATOR SOLDER TYPE	1	PCS
4	PE	PE NATURAL	A/R	g
5	PVC	45P PVC BLACK	A/R	g

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.25
.XXX ± 0.15
ANG ± 2°

PPOJECTION

照片框

ORDER INFORMATION

MIBUB-10B9A262830-M1M-LF

SERIES

LEADFREE
1000mm
MALE TO MALE
26/28/30 AWG
10B TO 9A TYPE

DESCRIPTION: USB 3.1 AM TO MIRCRO USB 3.1 BM L=1000 mm