


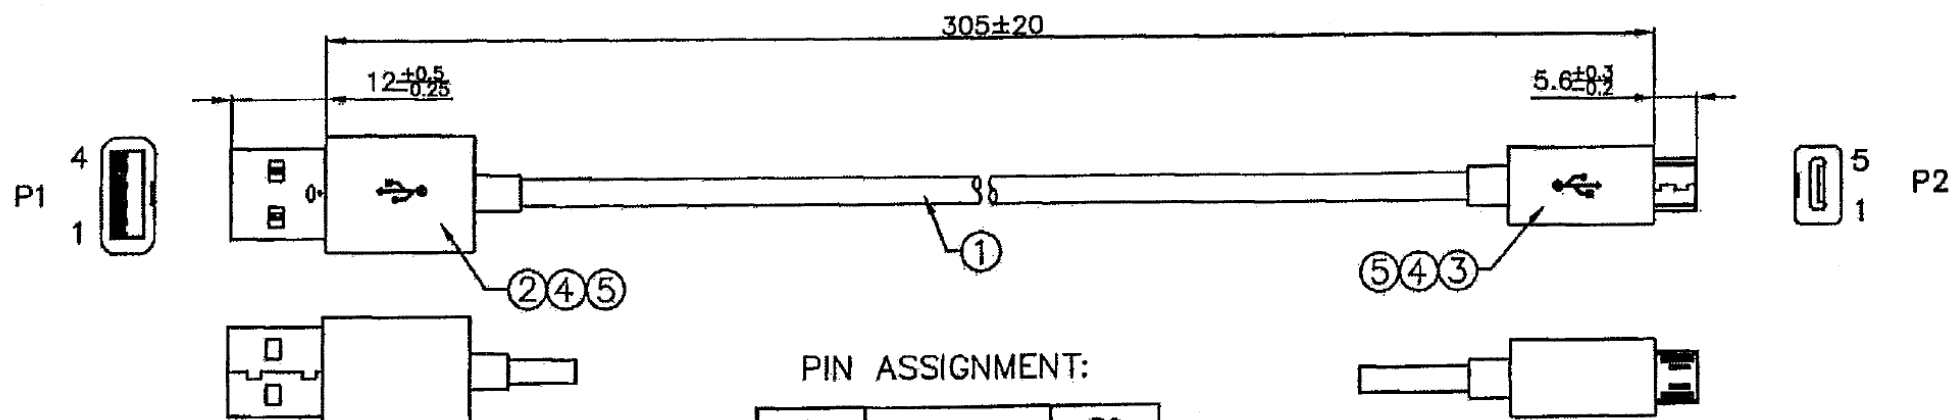

PIN ASSIGNMENT:

P1	COLOR	P2
1	RED	1
2	WHITE	2
3	GREEN	3
4	BLACK	5
SHELL	SHIELD	SHELL

NOTE:

1. OPEN/SHORT/INTERMITTENCE 100% TEST.
2. INSULATION RESISTANCE: DC300V/0.01SET,10M OHM MIN.
3. CONDUCTIVE RESISTANCE: 2 OHM MAX.
4. MOULD NO.: P1: R1US004M123/R2US004M123 ;
P2: R1MU005M97/R2MU005M97
5. HALOGEN-FREE COMPLIANT.

5	INNER MOLD	NA	LD-PE	A/R	KG
4	OVER MOLD	NA	73A TPE COLOR:BLACK UL94V-0	A/R	KG
3	CONN	NA	MICRO USB B/M MALE CONTACTS AREA GOLD PLATED OVER G/F BLACK INSULATION UL94V-0 NICKEL	1	SET
2	CONN	NA	USB A MALE CONTACTS AREA GOLD PLATED OVER G/F BLACK INSULATION UL94V-0 NICKEL FOR SHELL	1	SET
1	CABLE	NA	UL21394 30AWG*1P+24AWG*2C+AL+F+B(65% TC) OD:3.2MM JACKET:TPE COLOR:BLACK (NO MARKING)	AR	M
NO.	NAME	PART NO.	MATERIAL DESCRIPTION	QTY	UNITS

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X.±
.X±
.XX±
.XXX±
ANG±

照片框

ORDER INFORMATION

MIBUB-5B4A2430-M12N-LF

SERIES

LEADFREE

305mm

MALE TO MALE

24,30 AWG

5 PIN B TYPE TO 4 PIN A TYPE

DESCRIPTION: