


P1



P2

WIRING DIAGRAM

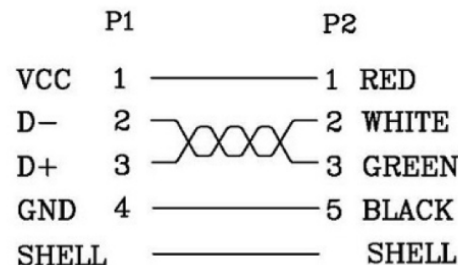

NOTES:

- 100% OPEN,SHORT & MISWIRE TESE.
- CONDUCTIVE RESISTANCE:20/MAX.
- INSULATION RESISTANCE:5MΩ/MIN.AT DC 300V

5	PVC	20	g	#BLACK 45P PVC
4	PE	8	g	LD-PE
3	CONN	1	PCS	MICRO USB 5P B TYPE MALE G/F
2	CONN	1	SET	USB A TYPE MALE G/F WHITE
1	CABLE	1000	mm	UL2725 28AWG*1P+28AWG*2C+AB OD:4.2MM #BLACK
No.	PART No.	QTY	UNITS	DESCRIPTION

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PJECTION

照片框

ORDER INFORMATION

MIBUB-5B4A28-M12N-LF

SERIES

LEADFREE

305mm

MALE TO MALE

28 AWG

4 PIN A TYPE

5 PIN B TYPE

DESCRIPTION: