


P1

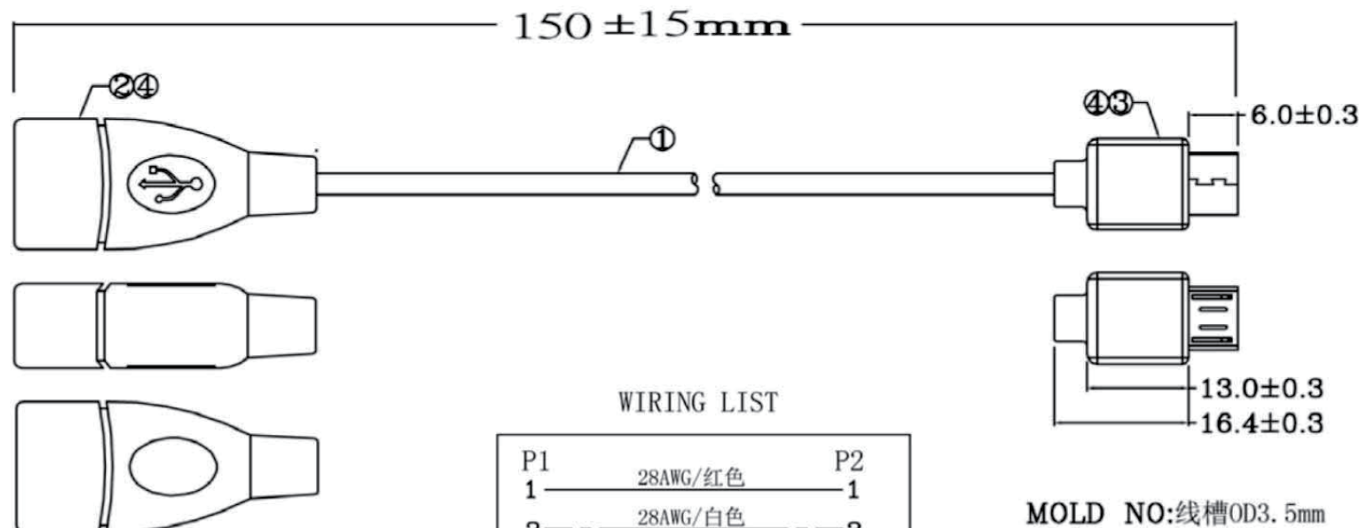

MOLD NO:YH-035内模
MOLD NO:YH-036外模

WIRING LIST

P1		P2
1	28AWG/红色	1
2	28AWG/白色	2
3	28AWG/绿色	3
4	28AWG/黑色	4P+5P
铁壳	编织	铁壳

MOLD NO:线槽OD3.5mm


NOTE:

1. 一般导通测试
2. OPEN/SHORT TEST:100%
3. CONDUCTOR RESISTANCE:5Ω
4. INSULATION RESISTANCE:5MΩ
5. CURRENT RATING:200V DC/10ms
6. 圖面上所顯示CONN.各面的示意圖,主要為方便客戶瞭解CONN.各面的外觀 而非成品固定排列方式

ITEM	DESCRIPTION	Q' TY
4	胶料 PVC 45P 黑色环保料.	AR
3	Connector USB Micro 5P(M) B TYPE 4P, 5P 需短接 端子镀金G/F 铁壳镀镍 黑色胶芯 RoHS	1Pcs
2	Connector USB A(F) 端子镀金 G/F 铁壳镀镍 白色胶芯 RoHS	1Pcs
1	Cable UL 2725 28AWG*1P+28AWG*2C+AB OD:3.5mm 外被黑色 RoHS	1Pcs

包装明细:

每一PCS装入小PE袋, 然后100PCS装入大PE袋.
 小PE袋规格:150mm*80mm*0.04mm. 有印字打孔.
 大PE袋规格:370mm*330mm*0.04mm. 有印字打孔.
 每箱装8袋*100PCS. 纸箱内须加防水袋.
 每箱数量 QTY: 800 PCS 此为估计的, 生产时以实际为准.
 净重 N. W: XXXX KG
 毛重 G. W: XXXX KG
 纸箱规格:55cm*26cm*21cm

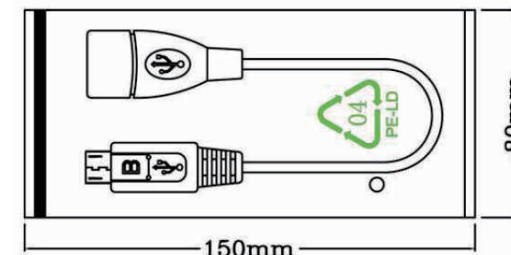

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
X, ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

MIBUB-5B4A2V28-E15C-LF

SERIES

LEADFREE

150mm

MALE TO FEMALE

28AWG

2.0REV

5 PIN B TO 4 PIN A TYPE

DESCRIPTION: USB A (F) TO Micro 5P NL=150mm (2.0)