



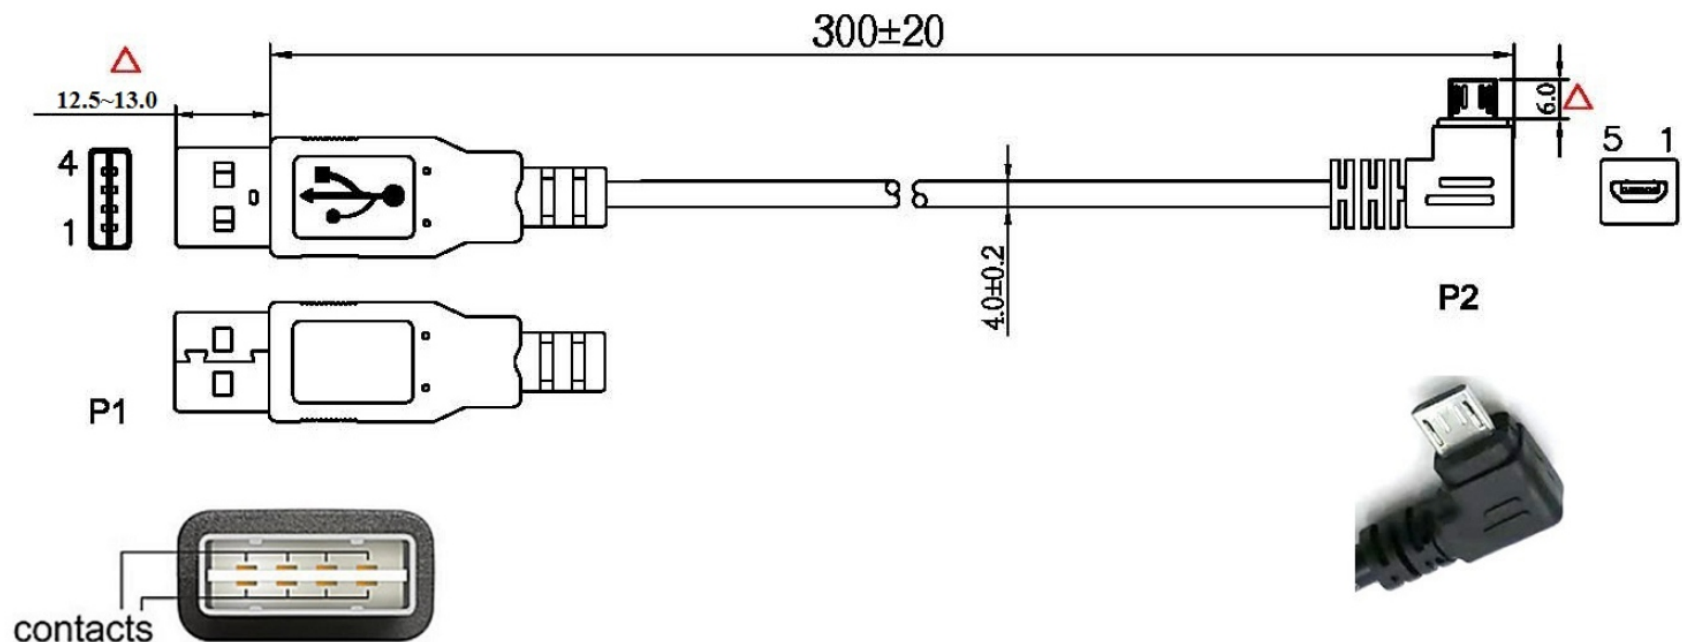

WIRING DIAGRAM

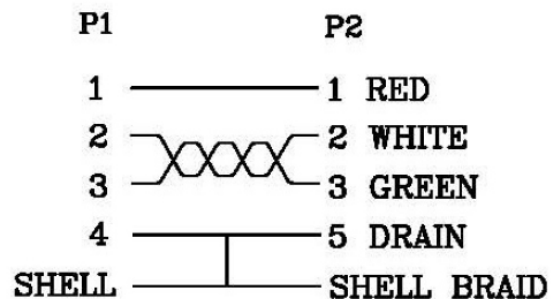

NOTES:

- 100% OPEN, SHORT & MISWIRE TEST.
- CONDUCTIVE RESISTANCE: 20/MAX.
- INSULATION RESISTANCE: 5MΩ/MIN. AT DC 300V

5	PVC	12	g	#BLACK 45P PVC ROHS
4	PE	4	g	LD-PE
3	CONN	1	PCS	MICRO USB 5P B TYPE MALE G/F
2	CONN	1	PCS	USB A M DOUBLE-SIDED G/F
1	CABLE	300	mm	UL2725 28AWG*1P+24AWG*2C+ AL+B(4/16/0.10CCS) OD:4.0±0.2mm #BLACK
No.	PART No.	Q'TY	UNITS	DESCRIPTION

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

MIBUB-5BRL4C2428-M30C-LF

SERIES

LEADFREE

300mm

MALE TO MALE

24/28 AWG

4 PIN C TYPE

90°LEFT

5 PIN B TYPE

DESCRIPTION: