



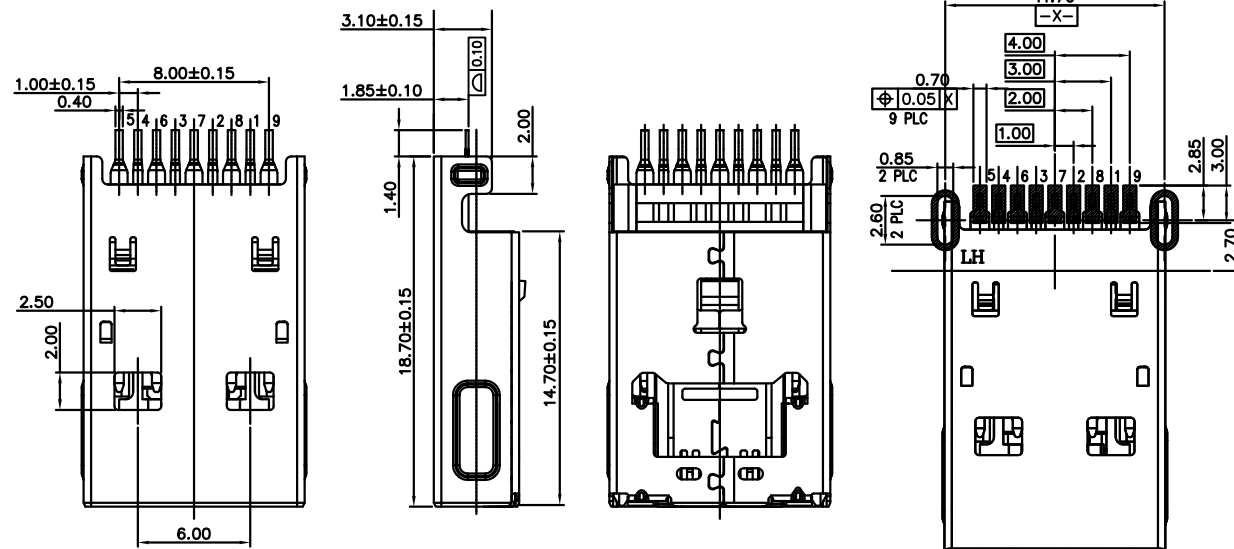

RECOMMEND P.C.B LAYOUT (THICKNESS=0.8mm)
(COMPONENT SIDE) TOLERANCE

Material:

- A. Insulator : Thermoplastic G.F. UL94V-0.
- B. Contacts : Copper Alloy.
- C. Shell : Metal.
- D. Environmental :
-55. C to +105. C

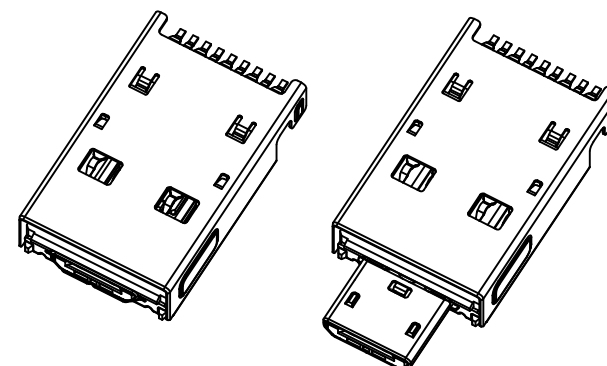

Pin Assignment		
USB3.0 A TYPE	MICRO B PLUG	Signal Name
PIN 1	PIN 1	V Bus
PIN 2	PIN 2	D-
PIN 3	PIN 3	D+
PIN 4	PIN 4	ID
PIN 5	PIN 5	GND
PIN 6		StdA_SSRX-
PIN 7		StdA_SSRX+
PIN 8		GND_DRAIN
PIN 9		StdA_SSTX-
PIN 10		StdA_SSTX+

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

MIBUB-PWM1-5B9ALF

SERIES

LEADFREE

5 PIN B TYPE TO 9 PIN A TYPE

METAL
90°SMT
MALE

DESCRIPTION: USB A公 3.0 沉板SMT