

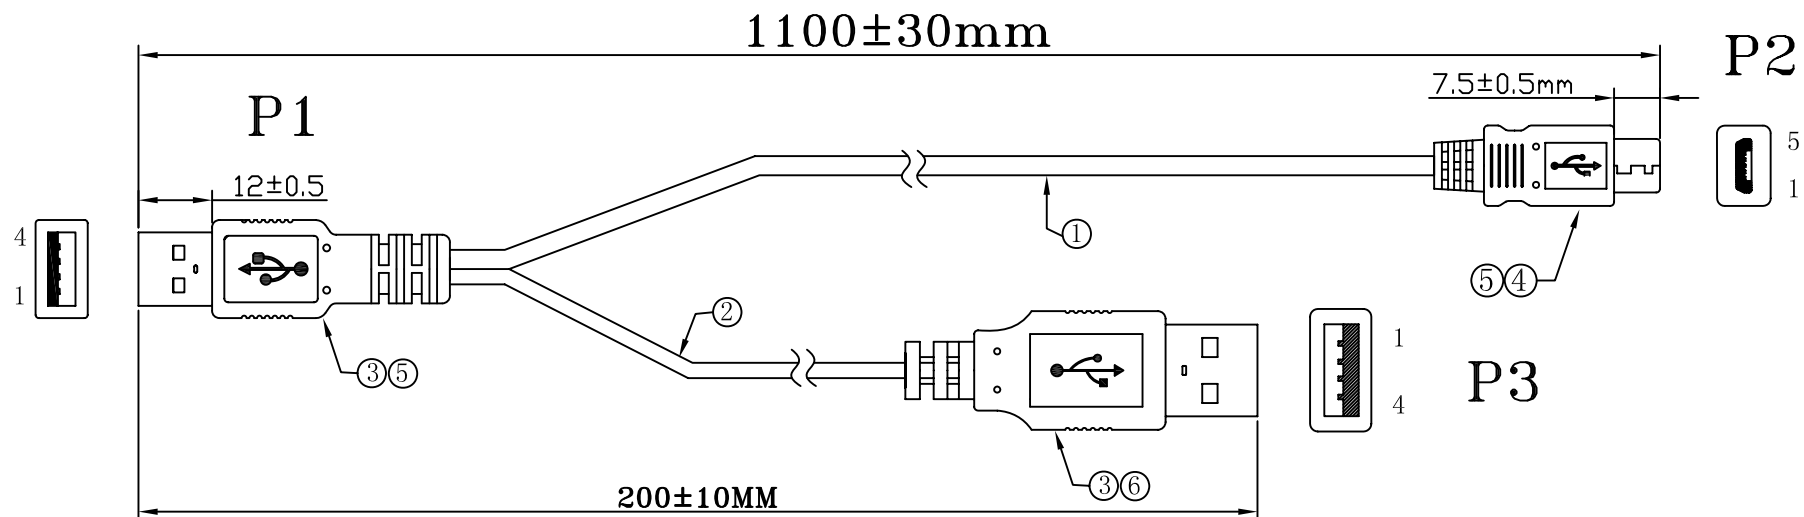


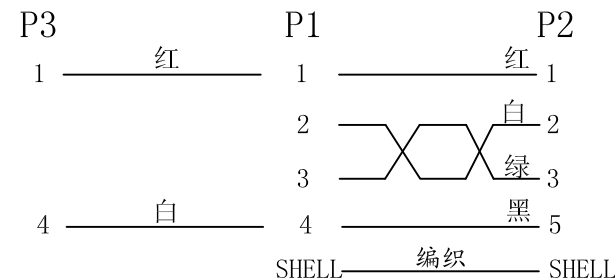

ELECTRONIC TEST:

1. 100% TEST, (Open, Short, Miss Wire).
2. Conduct Resistance: $1\Omega/\text{max}$.
3. Insulation Resistance: $20\text{M}\Omega/\text{min}$.
4. Hi-Pot: 300v dc/10ms.

PART LIST:ROHS

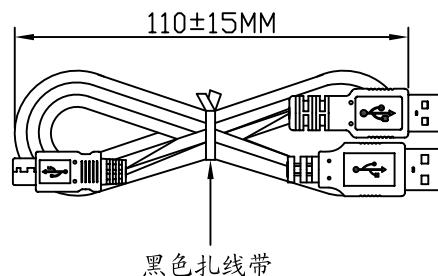

6	OUTER MOLDED:45P PVC RED(紅色).		
5	OUTER MOLDED:45P PVC BLACK (黑色).		Kg/1K
4	MICRO USB 5P B 公 焊线式 黑胶芯 铁壳镀镍 PIN针G/F	1	SET
3	USB A M 焊线式 白胶芯 铁壳镀镍 PIN针G/F	2	SET
2	24AWG*2C过粉 OD:3.0MM PVC JACKET BLACK L=200MM	1	PCS
1	UL2725 28AWG*1P+24AWG*2C+AEB OD:4.5mm PVC JACKET BLACK L=600MM	1	PCS
ITEM	STANDARD SPECIFICATION	Q' TY	UNIT

RoHS Compliant

TOLERANCES ARE

X, ±
X, ±
.XX ±
.XXX ±
ANG ±

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION



ORDER INFORMATION

MIBUBX12-5B4A2428-M1M1-LF

SERIES

LEADFREE

1100mm

24,24 AWG

5 PIN B TO 4 PIN A TYPE

DESCRIPTION: USB AM TO MICRO5P TO USB AM L1=1100MM L2=200MM

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

www.morethanall.com