

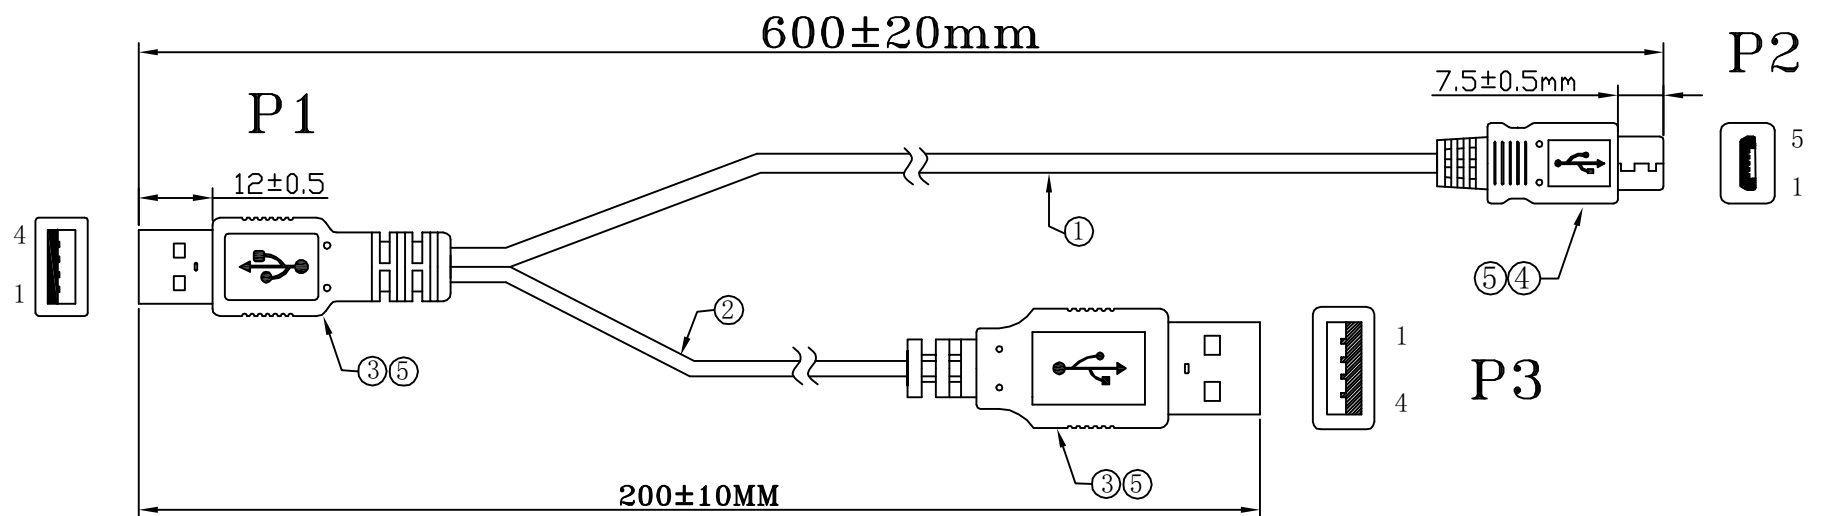


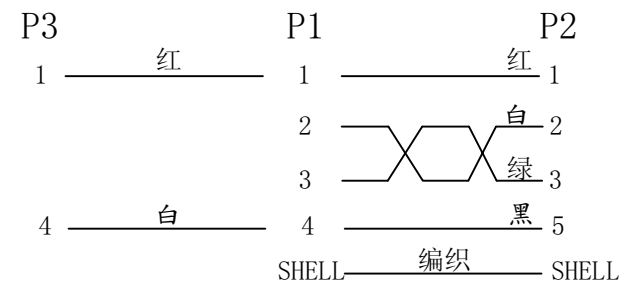

ELECTRONIC TEST:

1. 100% TEST, (Open, Short, Miss Wire).
2. Conduct Resistance: $1\Omega/\text{max}$.
3. Insulation Resistance: $20M\Omega/\text{min}$.
4. Hi-Pot: 300v dc/10ms.

PART LIST:ROHS

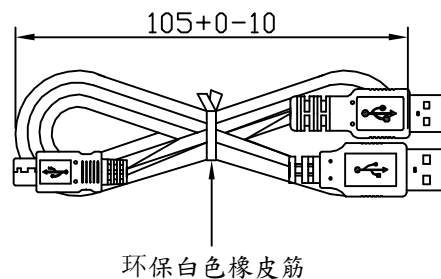

5	OUTER MOLDED:45P PVC BLACK		Kg/1K
4	MICRO USB 5P B 公 焊线式 黑胶芯 铁壳镀镍 PIN针G/F	1	SET
3	USB A M 焊线式 白胶芯 铁壳镀镍 PIN针G/F	2	SET
2	24AWG*2C过粉 OD:3.0MM PVC JACKET BLACK L=200MM	1	PCS
1	UL2725 28AWG*1P+24AWG*2C+AEB OD:4.5mm PVC JACKET BLACK L=600MM	1	PCS
ITEM	STANDARD SPECIFICATION	Q' TY	UNIT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

MIBUBX12-5B4A2428-M60C-LF

SERIES

LEADFREE

600mm

MALE TO MALE

24/28 AWG

5 PIN B TYPE TO 4 PIN A TYPE

DESCRIPTION: USB AM TO MICRO5P TO USB AM L1=600MM L2=200MM