


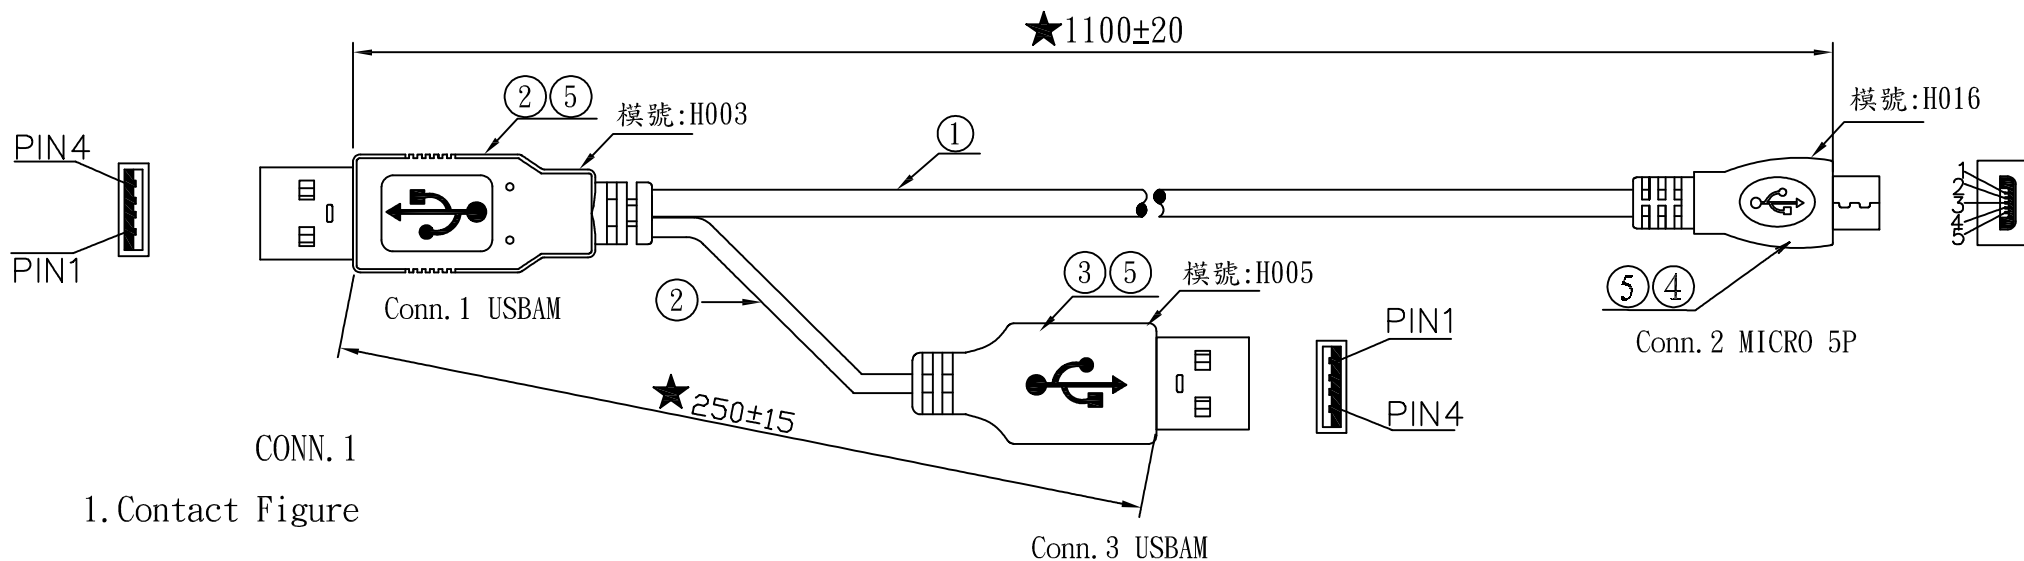

CONN. 1

1. Contact Figure

CONN. 1		CONN. 2		CONN. 3
1	Red 紅	1	Red 紅	1
2	White 白	2		
3	Green 綠	3		
4	Black 黑	5	Black 黑	4

SHELL ——— SHELL

2. ELECTRICAL PROPERTIES

A. Hi-Pot:300V

B. Contact Resistance:5Ω

C. Insulation Resistance:5MΩ

6	Packing			PCS
5	Outer Mold	45P PVC COLOR:BLACK	A/R	G
4	Connector	MICRO 5P Male Nickel Plated 模號:H016	1	PCS
3	Connector	USB A Male Nickel Plated 模號:H003 & H005	1	PCS
2	CABLE	30#*2C OD:3.0MM COLOR:BLACK	300	MM
1	CABLE	28#*1P+28#*2C+AL+32B OD:4.5MM COLOR:BLACK	800	MM
序號	部品名稱	規格描述	用量	單位

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

MIBUBX12-5B4A2830-M1M1-LF

SERIES

LEADFREE

28,30 AWG

5 PIN B TO 4 PIN A TYPE

DESCRIPTION: