


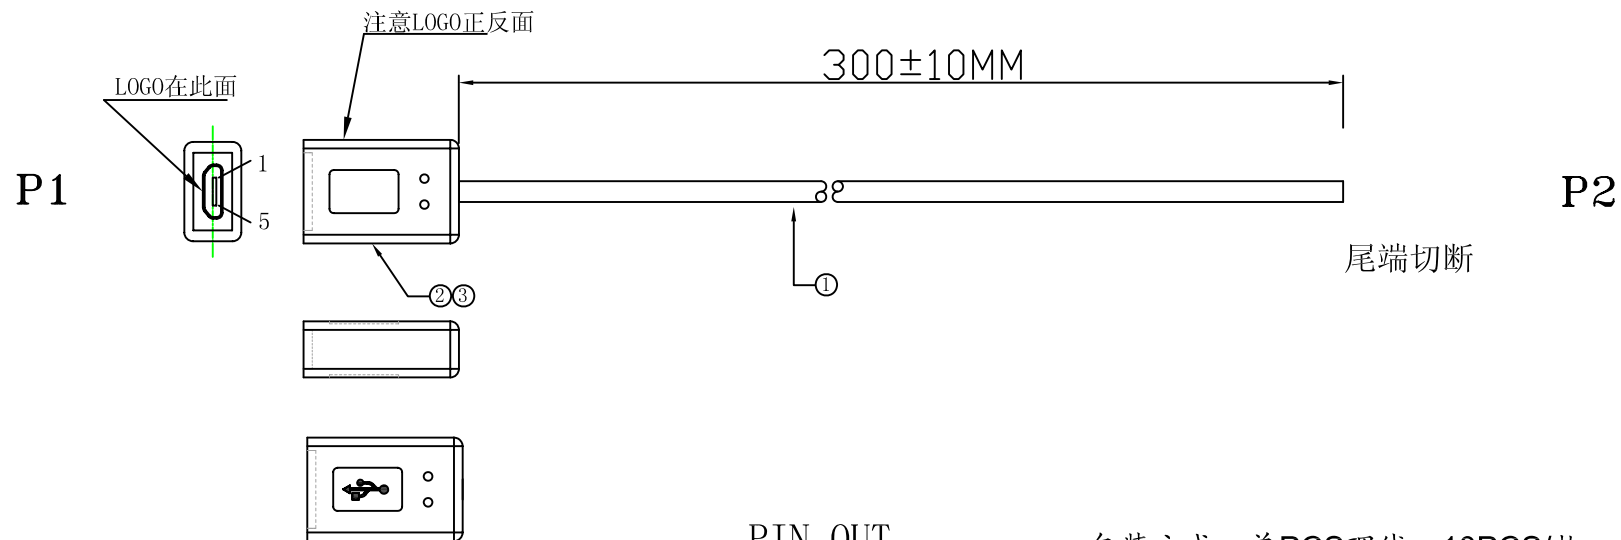


PIN OUT

P1	P2
1 RED (红)	OPEN
2 WHITE (白)	OPEN
3 GREEN (绿)	OPEN
5 BLACK (黑)	OPEN
SHELL BRAID (编织)	OPEN

切断

包装方式: 单PCS理线, 10PCS/扎,
100PCS/袋.



ELECTRONIC TEST CONDITION:
100% OPEN SHORT & MISWIRE TEST.
CONDCTIVE RESISTANCE:2Ω/MAX
INSULATION RESISTANCE:20MΩ/MIN.AT DC 300V

PART LIST:本产品均符合"ROHS"环保标准, 用的材料均为相当品。

ITEM	STANDARD SPECIFICATION	Q' TY	UNIT
3	PVC:45P 黑色.	1	PCS
2	MICRO 5P FEMALE TYPE CONNECTOR SHELL NICKEL	1	PCS
1	CABLE : UL 2725 (28AWG*1P)*2C+28AWG*2C+AL+B OD:3.5MM 黑色PVC外被 圆线.	1	PCS

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

MIBX1-5B0028-F30C-LF

SERIES

300mm

LEADFREE

FEMALE

28 AWG

5 PIN B TYPE

DESCRIPTION: MICRO 5P母 TO OPEN 切断 CABLE BLACK L=300MM