


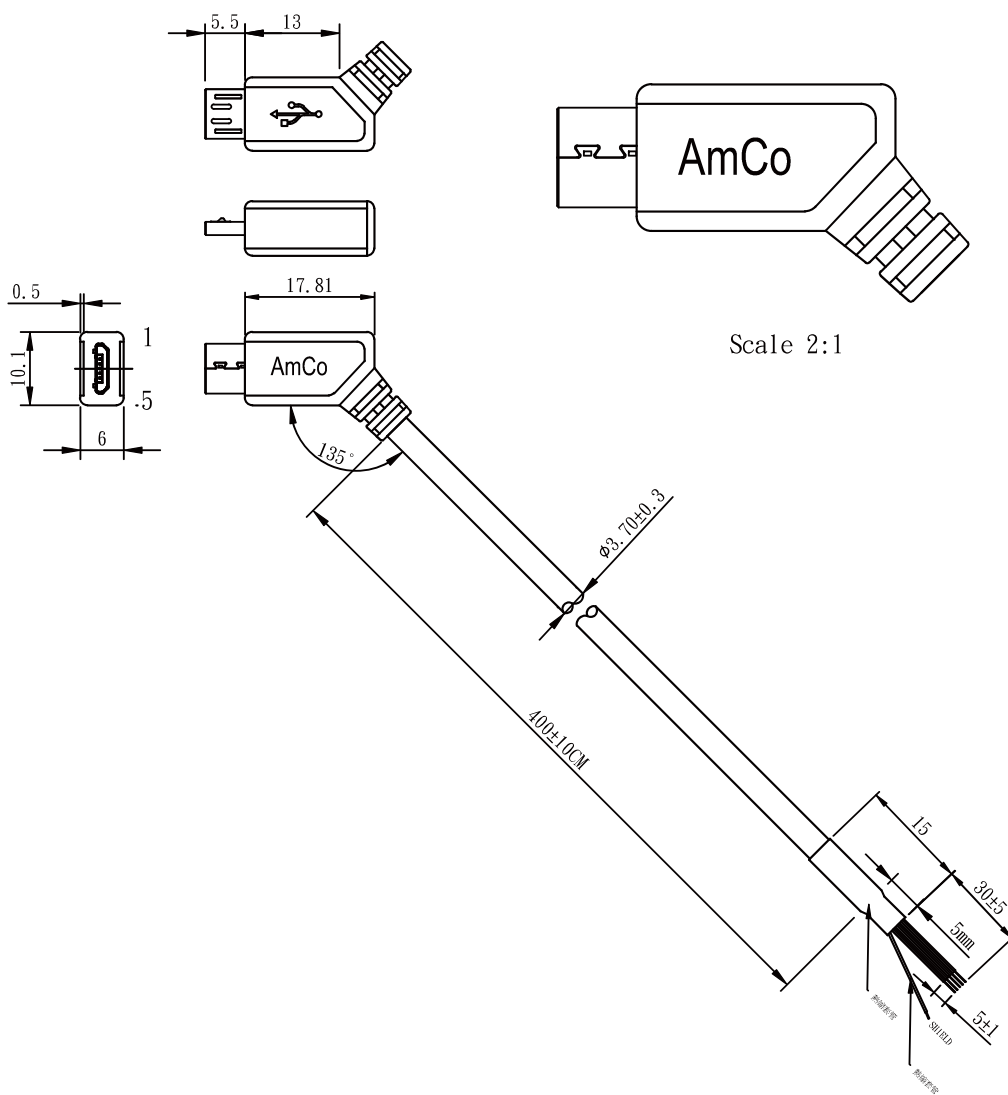


NOTE:

1. CONDUCTIVE RESISTANCE :5 ohm MAX.
2. INSULATION RESISTANDE : 10M ohm MIN.AT DC 300V

PIN ASSIGNMENT:

P1
(MICRO B 5P "M")

P2
OPEN

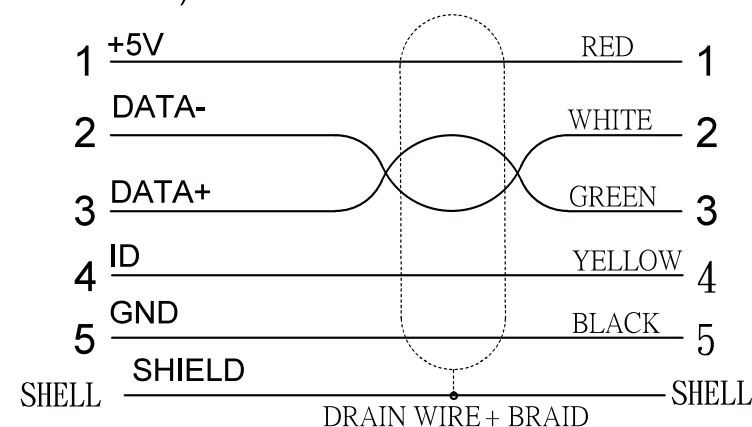

③	O/M	MOLDED: 35P PVC OVERMOLDED,	
②	CONN	Micro USB B TYPE(MALE),Au G/F,GRAY	1 PCS
①	WIRE	UL2725 1P*28AWG+2C*28AWG+AL.Mylar+Drain+Braid,USB2.0, OD:3.7mm °	
ITEM	NAME	Description	Q'TY

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG ±

照片框

ORDER INFORMATION

MIBX1-5BA0028GE-M4M-LF

SERIES

5 PIN B TYPE

ANGLE

28 AWG

GRAY

MALE

400CM

LEADFREE

DESCRIPTION: