



PIN OUT

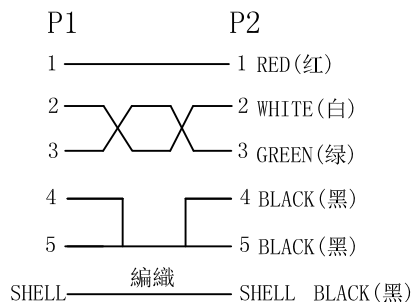

包装方式: 单PCS理线. 10PCS/扎. 100PCS/袋.



ELECTRONIC TEST CONDITION:
 100% OPEN SHORT & MISWIRE TEST.
 CONDUCTIVE RESISTANCE: 2Ω/MAX
 INSULATION RESISTANCE: 20MΩ/MIN. AT DC 300V

PART LIST: 本产品均符合"ROHS"环保标准, 用的材料均为相当品。

3	黑色PVC 45P外模料		KG/K
2	MICRO USB:5P GOLD 1U" CONNECTOR,NICKEL PLAIED SHELL,PLASTLC:BLACK	2	SET
1	CABLE: UL2725 28AWG*1P+28AWG*2C+AB OD:3.5MM 黑色外被 L=1500MM.	1	PCS
ITEM	STANDARD SPECIFICATION	Q' TY	UNIT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

PJECTION

照片框

ORDER INFORMATION

MIBX2-5B5B2805-M1M5-LF
 SERIES | | | LEADFREE
 | | | 1500mm
 | | | MALE TO MALE
 | | | 5C+1
 | | | 28 AWG
 | | | 5 PIN TO 5 PIN B TYPE

DESCRIPTION: USB MICRO 5P 双头 CABLE BLACK L=1500MM