
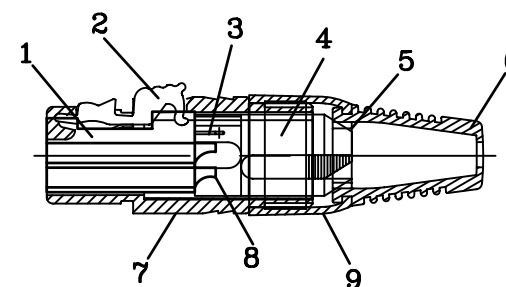
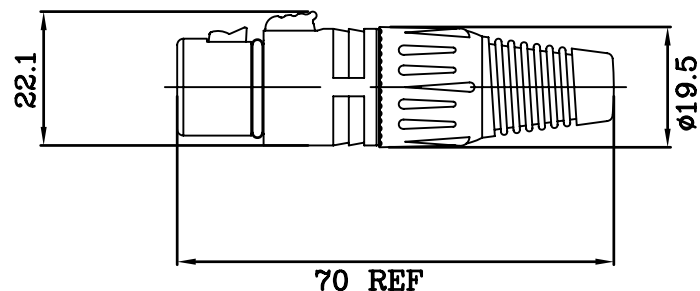


SPECIFICATIONS:

CONTACT RESISTANCE-<3M Ω
 INSULATION RESISTANCE->1G Ω
 DIELECTRIC STRENGTH-1500V/DC
 LIFE TIME(MATING CYCLES)>1000

CONTACT	SHELL
GOLD	GOLD
GOLD	NICKEL
SILIVE	NICKEL
NICKEL	NICKEL
GOLD	BLACK PAINT

9	ABS-BLACK
8	BRASS
7	ZINC-NICKEL PLATED (BLACK)
6	TPR-BLACK
5	POM-BLACK
4	POM-BLACK
3	SUS-304/NICKEL PLATED
2	ZINC-NICKEL PLATED
1	ZINC-NICKEL PLATED
	MATERIAL

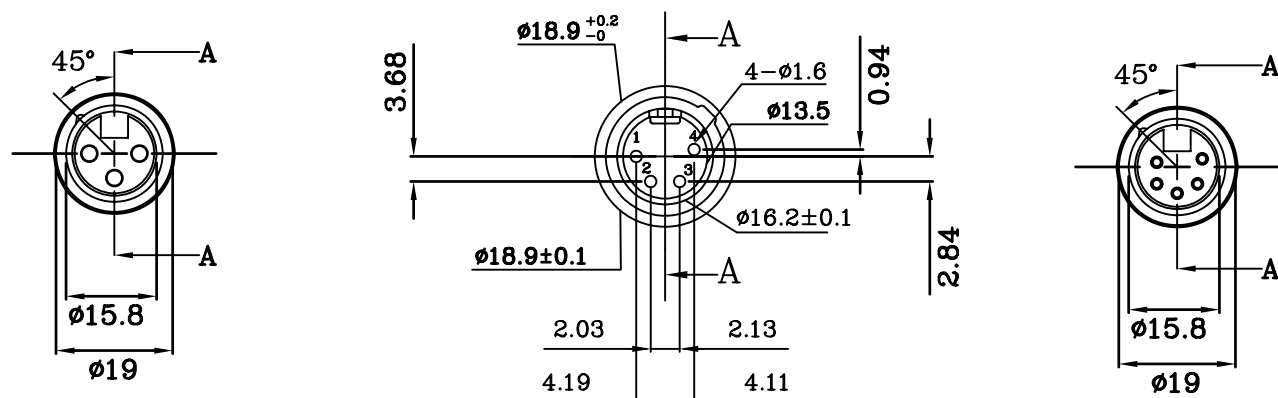

SECTION A-A

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±



ORDER INFORMATION

MIC-SAGK-xx-LF
 SERIES LEADFREE
 03-05WAY
 BLACK
 GOLD
 ASSEMBLY
 FEMALE

DESCRIPTION: