
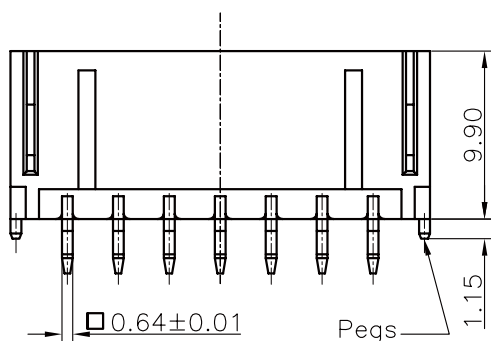
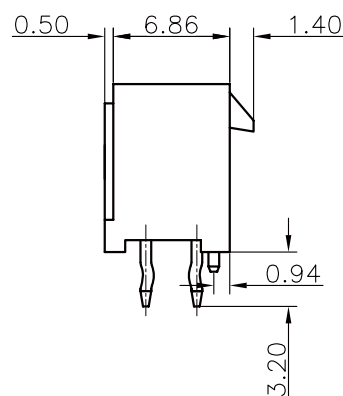



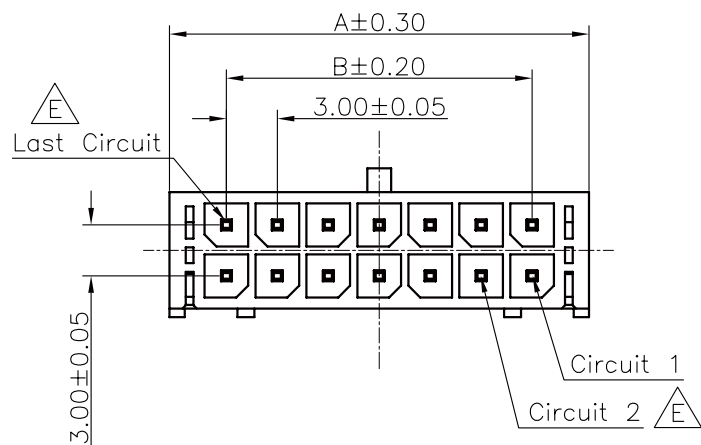

Circuits	Dimension		Circuits	Dimension	
	A	B		A	B
2	6.7	—	14	24.7	18.0
4	9.7	3.0	16	27.7	21.0
6	12.7	6.0	18	30.7	24.0
8	15.7	9.0	20	33.7	27.0
10	18.7	12.0	22	36.7	30.0
12	21.7	15.0	24	39.7	33.0

Specifications:

Current Rating:5.0A AC/DC

Voltage Rating:250V AC/DC

Contact Resistance:10m ohm. Max.

Insulation Resistance:1000M ohm. Min.

Withstanding Voltage:AC 1500V AC/minute

Operating Temperature Range:-25°C ~ +105°C


Material and Finish

Insulator:High Temp. Plastic (Nylon 46 UL94V-0)

Insulator Color:Black

Contact:Copper Alloy

Finish:Tin Plated

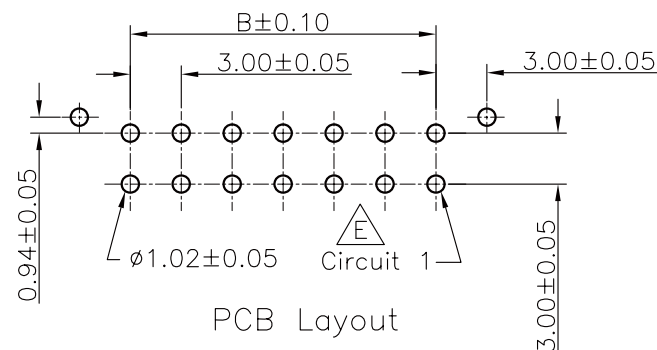

PCB Layout

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1


DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X. ±
.X ± 0.20
.XX ± 0.10
.XXX ±
ANG ±



ORDER INFORMATION

MIF-PDP-2Xxx-LF
SERIES
LEADFREE
2X01:02WAY
2X12:24WAY
POST
DIP 180°
MALE

DESCRIPTION: 3.0mm Pitch Power Wafer Straight Type