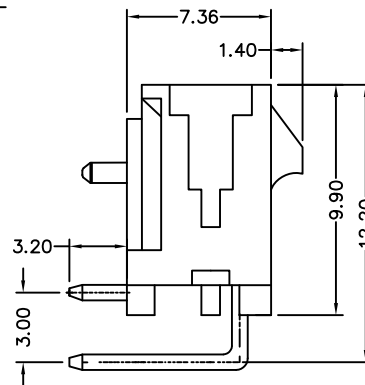
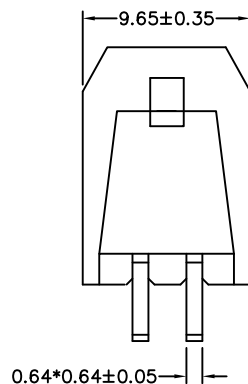
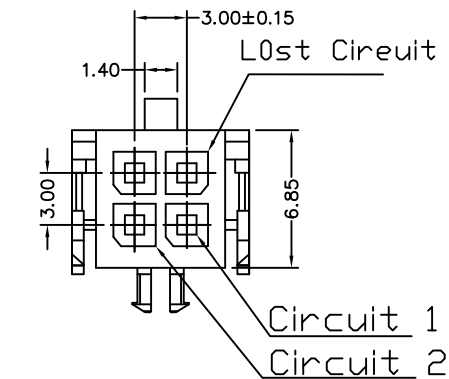


Recommended P.C.B Layout

MATERIAL
 WAFER:HTN UL 94V-0 Δ
 CONTACTS:BRASS
 PLATING:IN OVER NICKEL

SPECIFICATION
 Current Rating:1A AC,DC
 Voltage Rating:50V AC,DC
 OPERATING TEMPERATURE: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
 Contact Resistance:20m Ω Max
 Insulation Resistance:100M Ω Min
 Withstanding Voltage:500V AC/minute

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
 .X ± 0.30
 .XX ± 0.20
 .XXX $\pm$
 ANG $\pm 3^{\circ}$

照片框

ORDER INFORMATION

MIF-PRP-2X02-LF
 SERIES POST 04 WAY LEADFREE
 DIP 90°
 MALE

DESCRIPTION:POWER CONNECTOR MO 3.0mm HEADER RIGHT ANGLE TYPE