
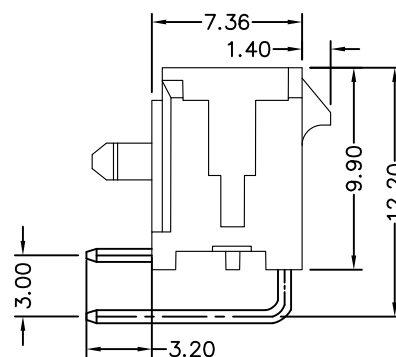
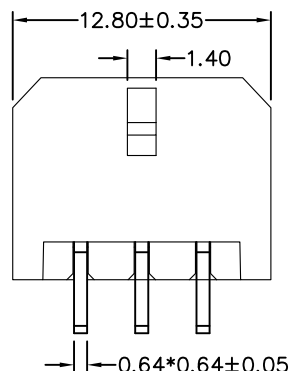


Recommended P.C.B Layout

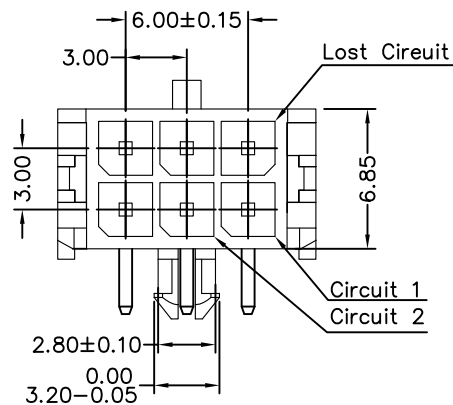

## MATERIAL

WAFER:NY6T UL 94V-0

CONTACTS:BRASS

PLATING:IN OVER NICKEL

## SPECIFICATION

Current Rating:1A AC,DC

Voltage Rating:50V AC,DC

OPERATING TEMPERATURE:-25°C~+85°C

Contact Resistance:20mΩ Max

Insulation Resistance:100MΩ Min

Withstanding Voltage:500V AC/minute

## RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±  
.X ± 0.30  
.XX ± 0.20  
.XXX ±  
ANG ± 3°

PPOJECTION

照片框

## ORDER INFORMATION

MIF-PRP-2X03-LF  
SERIES POST 06 WAY LEADFREE  
DIP 90°  
MALE

DESCRIPTION: