
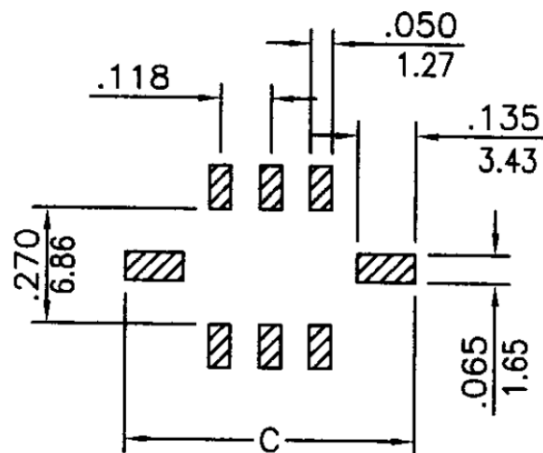


(NO. OF CONTACTS-1)x3.0

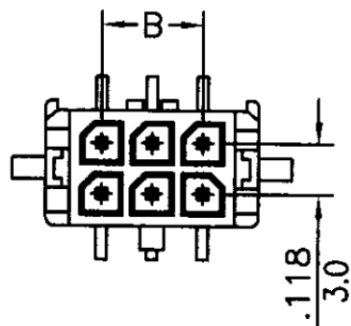



(NO. OF CONTACTS)x3.0+7.7

- * Poles:2-24
- * Material:Insulator:High Temp LCP UL94V-0 BLACK
- * Contact:Brass Tin plated

Specifications

- * Current rating: 5A AC, DC
- * Voltage rating: 250V AC, DC
- * Temperature range: -40°C~+105°C
- * Insulation resistance: 1,000MΩ min.
- * Withstand voltage: 1500V AC/minute

(NO. OF CONTACTS)x3.0+3.7

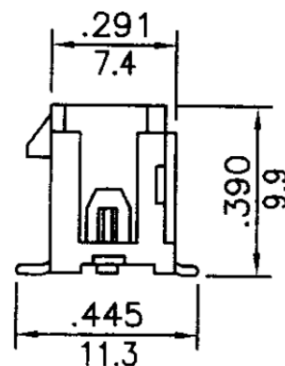

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

ORDER INFORMATION

MIF-PVE-2Xxx-LF
SERIES | LEADFREE
2X01:02WAY
2X12:24WAY
EAR
180°SMT
MALE

DESCRIPTION: