


Specifications:
 Current Rating: 5.0A AC,DC
 Voltage Rating: 250V AC,DC
 Contact Resistance: 10m ohm.Max
 Insulation Resistance: 1000M ohm.Min
 Withstanding Voltage: 1500V AC/Minute
 Operating Temperature Range: -40°C ~ +125°C

Material:
 Insulator: LCP(UL94V-0)
 Insulator Color: Black
 Contact: Copper Alloy
 Plated: Gold or Tin Plated

Positions	Dimension			Positions	Dimension		
	A	B	C		A	B	C
2	9.65	3.00	14.20	8	27.65	21.00	32.20
3	12.65	6.00	17.20	9	30.65	24.00	35.20
4	15.65	9.00	20.20	10	33.65	27.00	38.20
5	18.65	12.00	23.20	11	36.65	30.00	41.20
6	21.65	15.00	26.20	12	39.65	33.00	44.20
7	24.65	18.00	29.20				

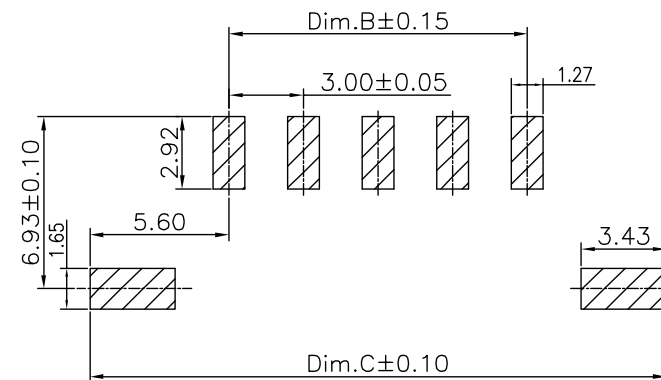

P.C.B Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PJECTION


X, ±
 .X ± 0.20
 .XX ± 0.15
 .XXX ±
 ANG ±

照片框

ORDER INFORMATION

MIF-PWE-1Xxx-LF
 SERIES | LEADFREE
 | 1X02:02 WAY
 | 1X12:12 WAY
 MALE | EAR
 90°SMT

DESCRIPTION: 3.0mm Pitch Power Wafer SMD Type

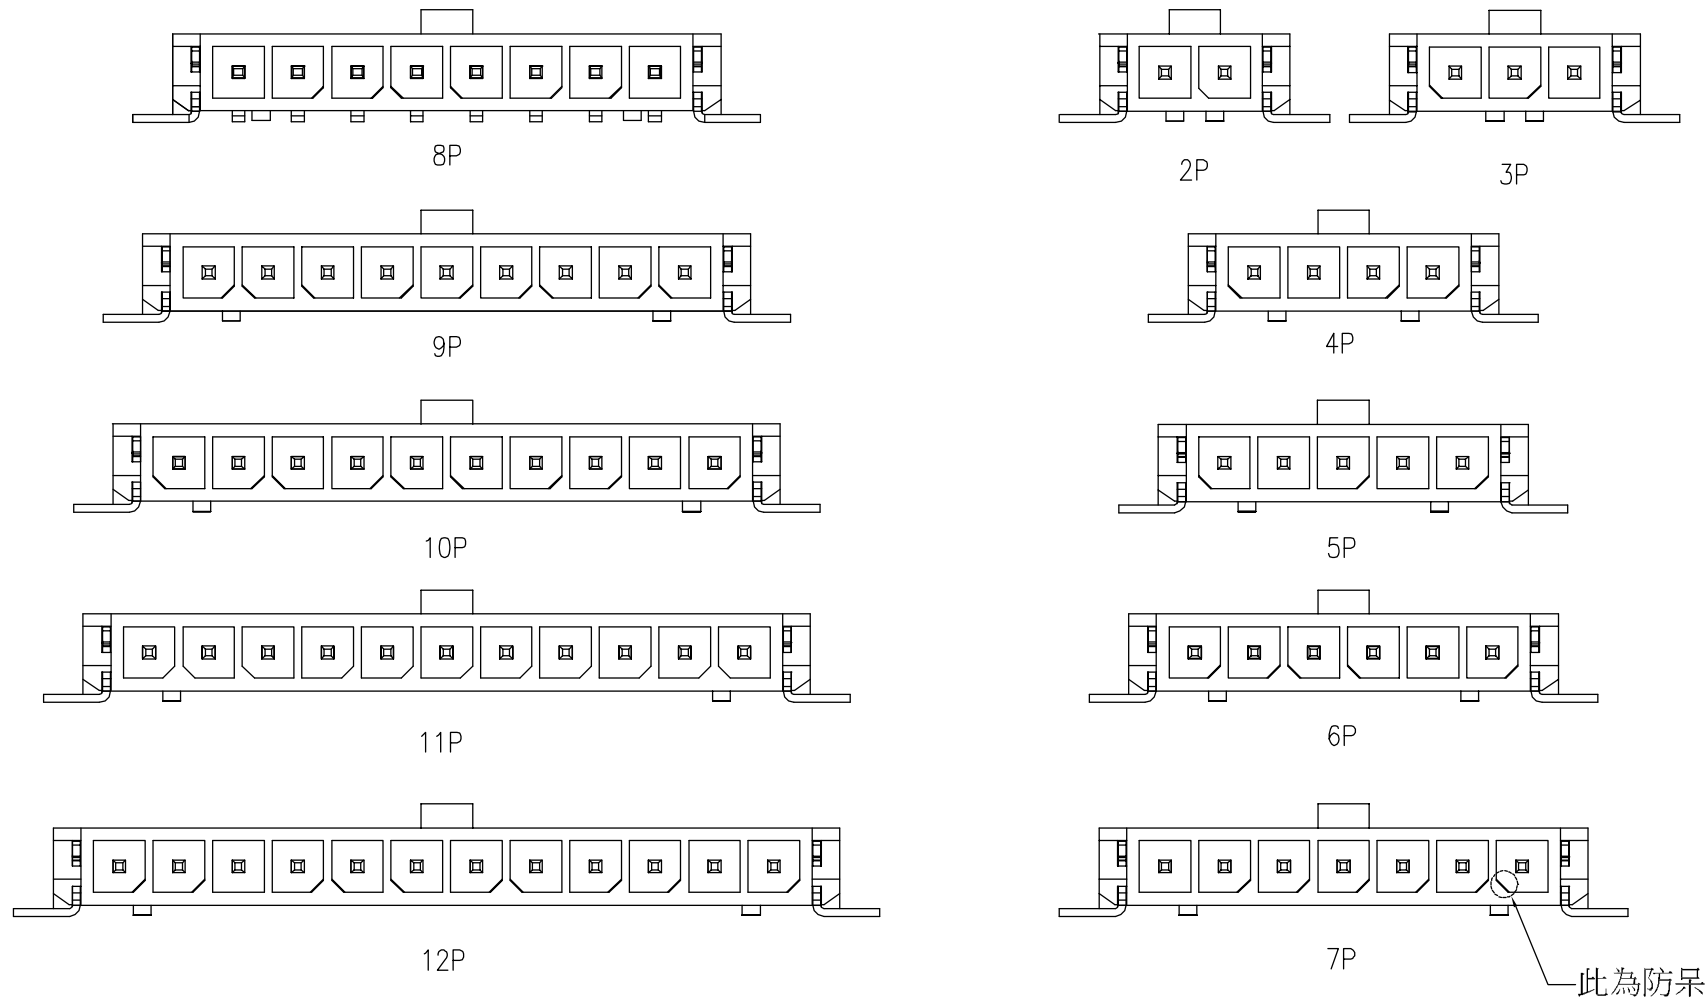

2-12 Pin防呆位置分部示意图

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X ± 0.20

UNIT / mm

SCALE 1 : 1

.XX ± 0.15

DATE

.XXX ±

ANG ±

煜倫股份有限公司


www.morethanall.com

SIZE A4

P PROJECTION

照片框

ORDER INFORMATION

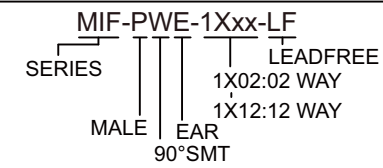

DESCRIPTION: 3.0mm Pitch Power Wafer SMD Type