
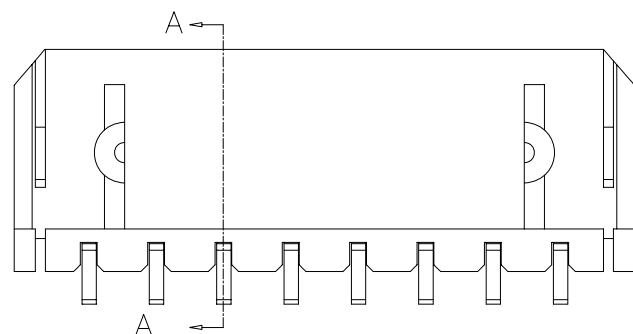
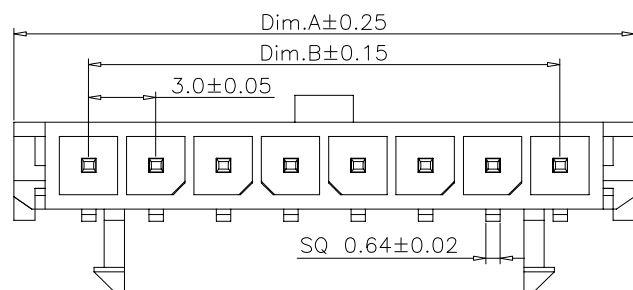


Specifications:

Current rating:5.0Amps

Voltage rating:250V AC,DC

Contact resistance:10mohm Max

Insulation resistance:1,000Mohm min.

Withstanding voltage:1,500V AC;DC

Operating Temperature range:-25°C ~ +105°C

Materials:


Insulator:High Temp.Plastic(Nylon 46 UL94V-0)

Color:Black

Contact:Copper Alloy

Plating:Tin Plated

Positions	Dimension			Positions	Dimension		
	A	B	C		A	B	C
2	9.65	3.00		8	27.65	21.00	16.70
3	12.65	6.00		9	30.65	24.00	19.70
4	15.65	9.00	4.70	10	33.65	27.00	22.70
5	18.65	12.00	7.70	11	36.65	30.00	25.70
6	21.65	15.00	10.70	12	39.65	33.00	28.70
7	24.65	18.00	13.70				

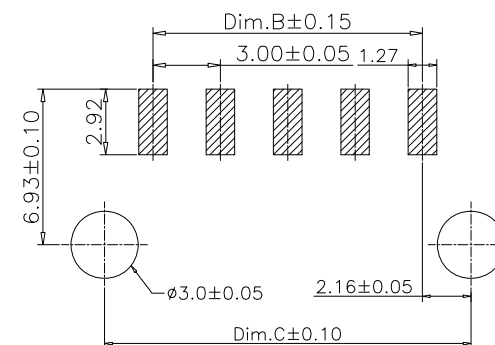

PCB LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X.±
.X±
.XX±
.XXX±
ANG±

照片框

ORDER INFORMATION

MIF-PWP-1Xxx-LF

SERIES

MALE

90°SMT

EAR

LEADFREE

1X02:02 WAY

1X12:12 WAY

DESCRIPTION: 3.0mm Wafer Single Row SMD Type