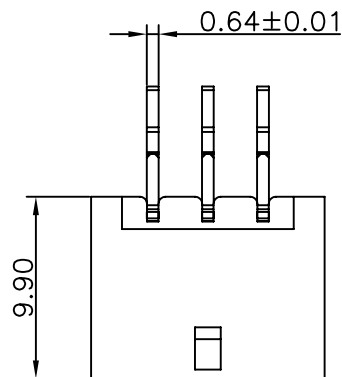


Specifications:

Current rating:5.0A AC,DC

Voltage rating:250V AC, DC

Contact tesistance:10m ohm Max

Insulation resistance:1000M ohm Min

Withstanding voltage:AC 1500V AC/minute




Operating Temperature:-25°C ~ +85°C

Materials:

Insulator:High Temp Plastic UL94V-0

Contact material:Copper Alloy

Finish:Tin Plated

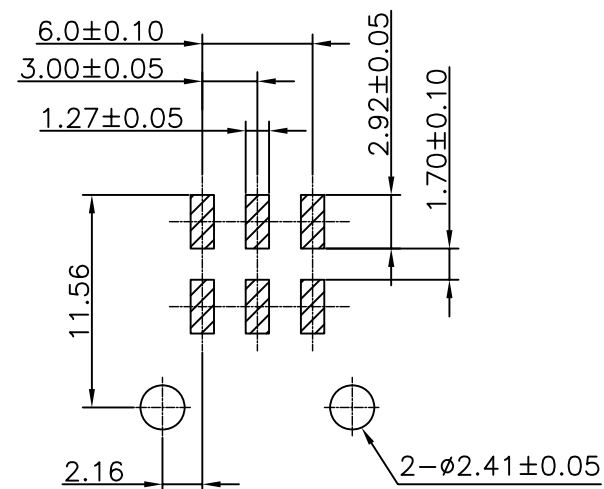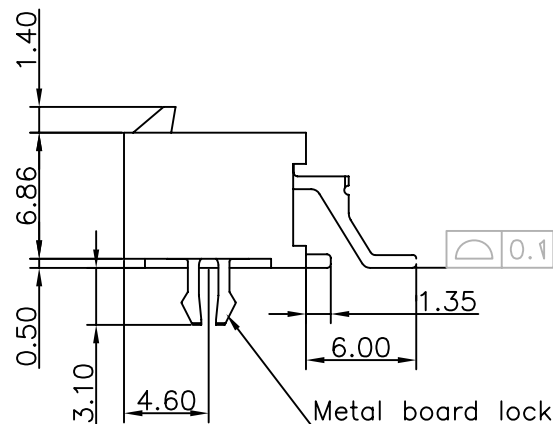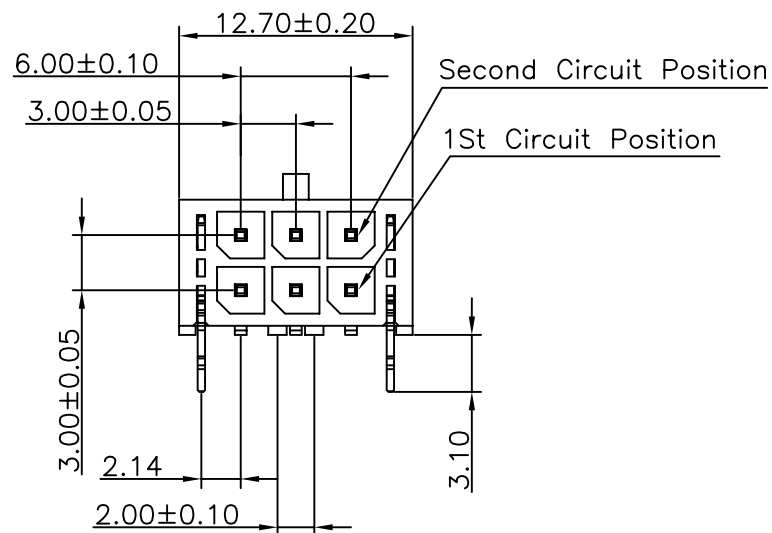

PCB Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X, ±

.XX, ±

.XXX, ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MIF-PWZ-2X03-LF

SERIES MIF-PWZ-2X03-LF
CLIP 06 WAY
90°SMT
MALE

DESCRIPTION: 3.0mm Pitch Power Wafer SMD Type