

## Specifications:

Current rating:5.0A AC,DC

Voltage rating:250V AC, DC

Contact resistance:10m ohm Max

Insulation resistance:1000M ohm Min

Withstanding voltage:AC 1500V AC/minute






Operating Temperature:-25°C ~ +85°C

Materials:

Insulator:High Temp Plastic UL94V-0

Contact material:Copper Alloy

Finish:Tin Plated

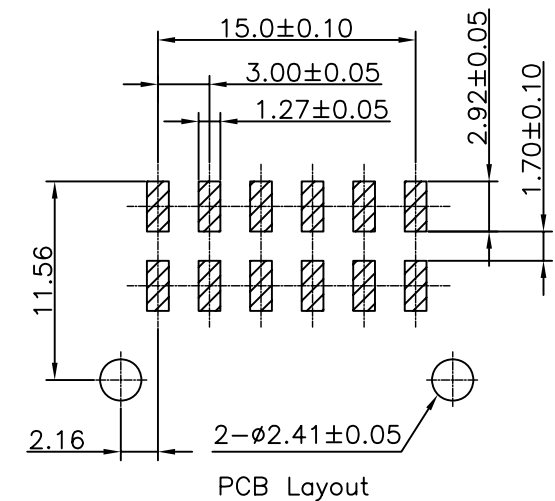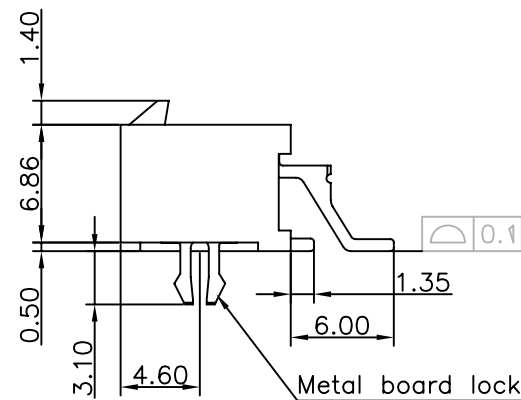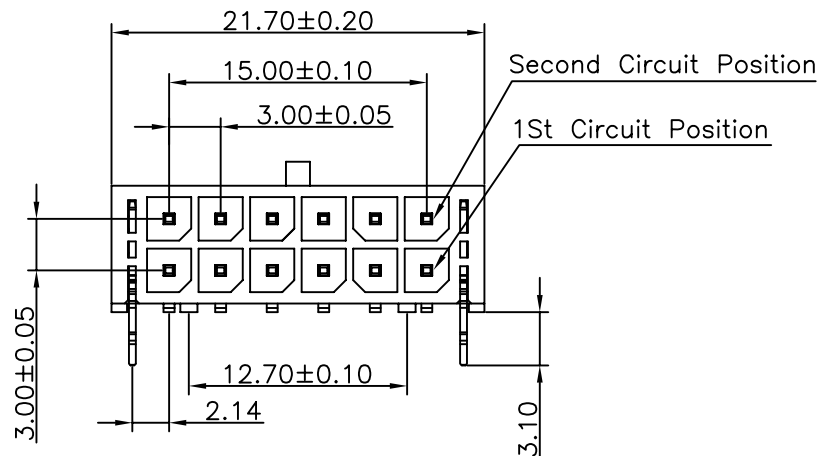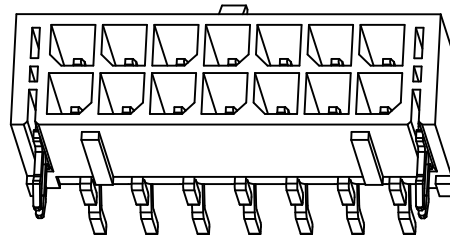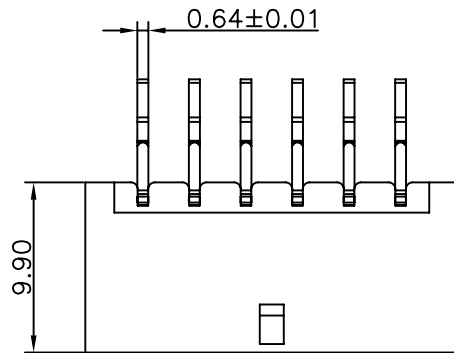

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X.±  
.X±  
.XX±  
.XXX±  
ANG±

照片框

**ORDER INFORMATION**

MIF-PWZ-2X06-LF  
SERIES MIF PWZ 2X06 LF LEADFREE  
CLIP 12 WAY  
90°SMT  
MALE

DESCRIPTION:3.0mm Pitch Power Wafer SMD Type