


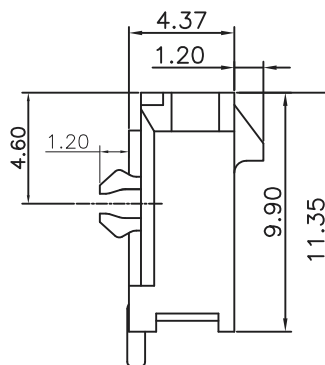



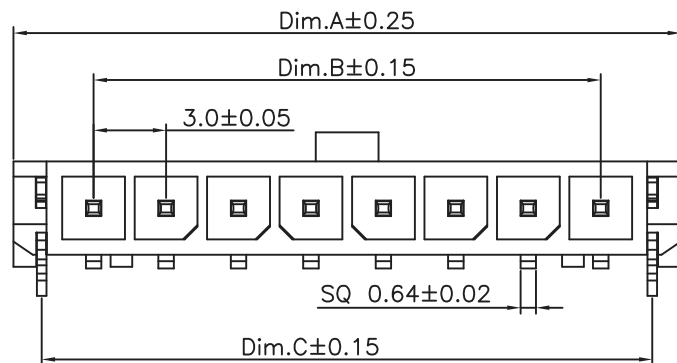

Specifications:
Current rating:5.0Amps
Voltage rating:250V AC,DC
Contact resistance:10mohm Max
Insulation resistance:1,000Mohm min.
Withstanding voltage:1,500V AC;DC
Operating Temperature range:−25°C ~ +105°C
Materials:
Insulator:High Temp.Plastic(LCP UL94V-0)
Color:Black
Contact:Copper Alloy
Plating:Tin Plated

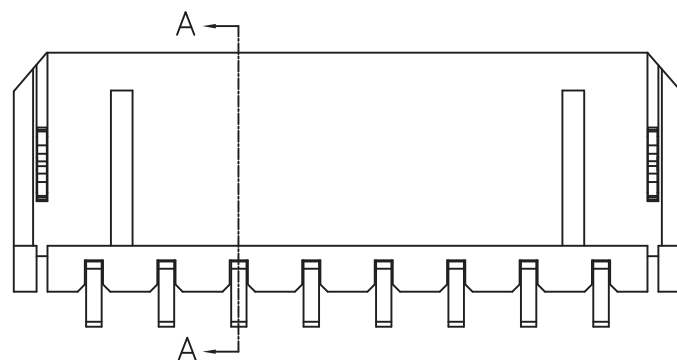

Positions	Dimension			Positions	Dimension		
	A	B	C		A	B	C
2	9.65	3.00	7.30	8	27.65	21.00	25.30
3	12.65	6.00	10.30	9	30.65	24.00	28.30
4	15.65	9.00	13.30	10	33.65	27.00	31.30
5	18.65	12.00	16.30	11	36.65	30.00	34.30
6	21.65	15.00	19.30	12	39.65	33.00	37.30
7	24.65	18.00	22.30				

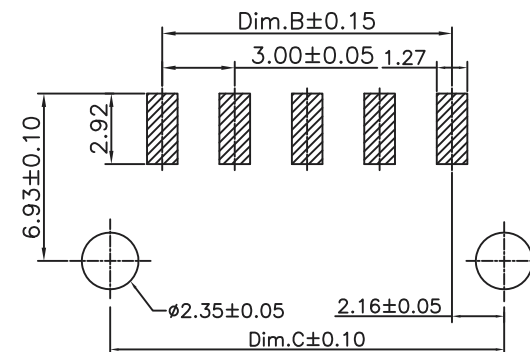

PCB LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION


X, $\pm$
.X $\pm$ 0.20
.XX $\pm$ 0.15
.XXX $\pm$
ANG $\pm$

照片框


ORDER INFORMATION

MIF-PWZ12-1Xxx-LF
SERIES
MALE
CLIP 1.2mm
90°SMT
LEADFREE
1X02:02WAY
1X12:12WAY


DESCRIPTION: 3.0mm Wafer Single Row SMD Type

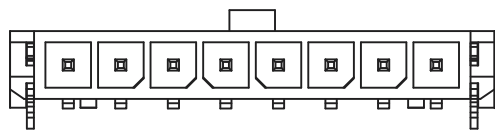


8P

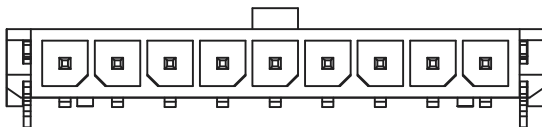


9P

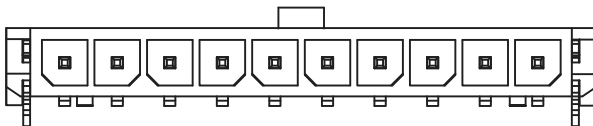


10P

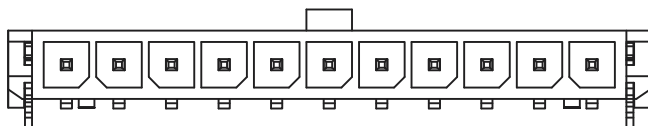


11P

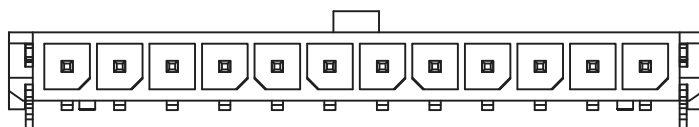


12P

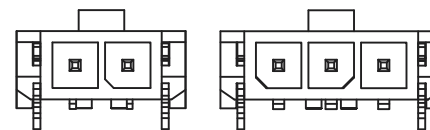


2P




3P




4P



5P

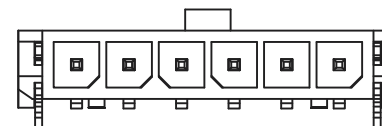

6P

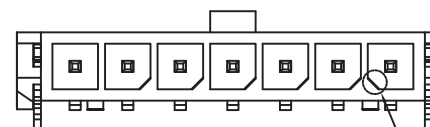

7P

此為防呆

(2-12)Pin防呆位置分部示意圖

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.10
.XX ± 0.05
.XXX ± 0.03
ANG ±

照片框

ORDER INFORMATION

MIF-PWZ12-1Xxx-LF
SERIES | LEADFREE
MALE | CLIP 1.2mm
90°SMT

DESCRIPTION: 3.0mm Wafer Single Row SMD Type