
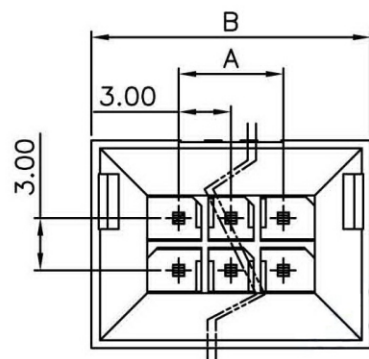


RECOMMENDED PCB LAYOUT



NOTE :

- * Material : Nylon UL 94V-0
- * Color : Black
- * Current rating : 5A, AC/DC
- * Voltage rating : 250V, AC/DC

headers

- * 4-24 circuits available
- * Dual row

CIRCUITS	DIM. A	DIM. B	DIM. C
4	3.00	13.00	12.00
6	6.00	16.00	15.00
8	9.00	19.00	18.00
10	12.00	22.00	21.00
12	15.00	25.00	24.00
14	18.00	28.00	27.00
16	21.00	31.00	30.00
18	24.00	34.00	33.00
20	27.00	37.00	36.00
22	30.00	40.00	39.00
24	33.00	43.00	42.00

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 2°

PPOJECTION

照片框

ORDER INFORMATION

MIFB-PDP-2Xxx-LF
SERIES LEADFREE
2X02:04WAY
2X12:24WAY
MALE POST
DIP 90°

DESCRIPTION: