


WIRING DIAGRAM

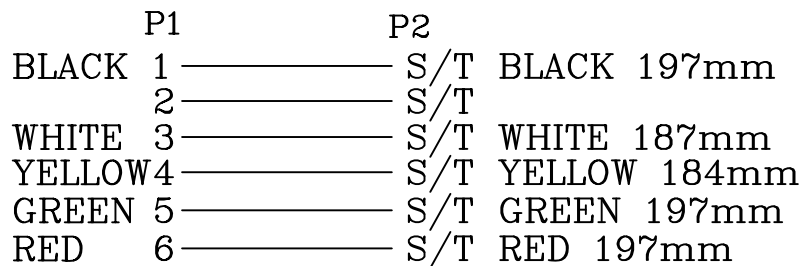

4	PVC	1	PCS	PVC 5*150mm WHITE(-40°C+105°C)
3	TERMINAL	6	PCS	MX3.0-TP-FEMALE
2	HOUSING	1	PCS	MX3.0-2*3PH-MALE(-40°C+105°C)
1	CABLE	1	SET	UL3239 24AWG 197*4*5mm #RED UL3239 24AWG 197*4*5mm #BLACK UL3239 24AWG 197*4*5mm #GREEN UL3239 24AWG 187*4*5mm #WHITE UL3239 24AWG 184*4*5mm #YELLOW(-50°C)
NO.	PART NO.	Q'TY	UNITS	DESCRIPTION

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X.±

.X±

.XX±

.XXX±

ANG±

PPOJECTION

照片框

ORDER INFORMATION

MIFX1-B030024TB1-FN19C7-LF

SERIES

06 WAY

TUBE  
24 AWG

LEADFREE  
197mm  
INNER LENGTH  
FEMALE

DESCRIPTION: MIF 3.0 6P TO TIN L:197mm