

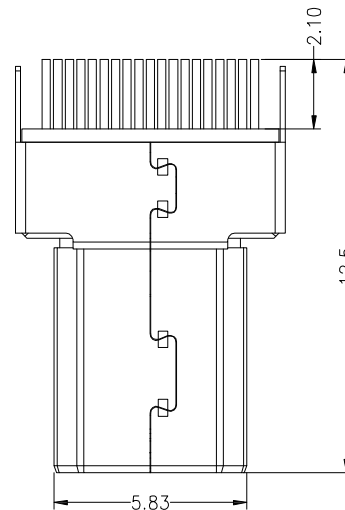
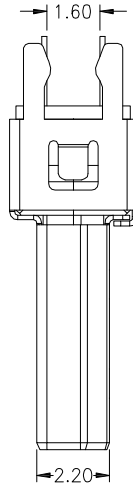
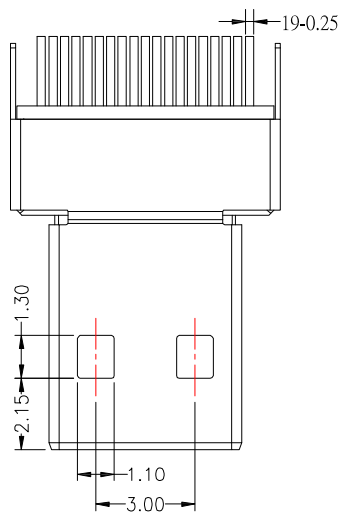
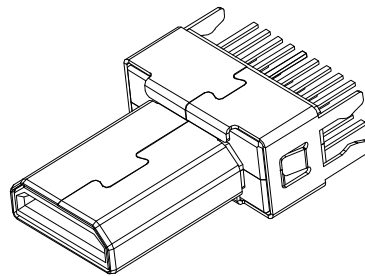



PCB LAYOUT(TOP)

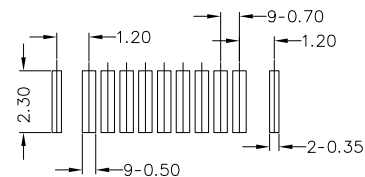

PCB LAYOUT(BOTTOM)

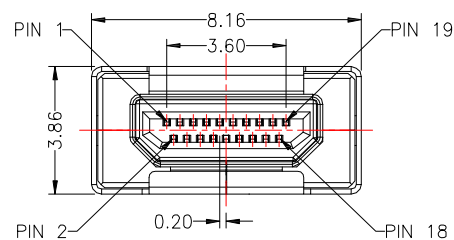

SPECIFICATIONS :

1. INSERTION FORCE : 44.1N MAX
2. WITHDRAWAL FORCE : 5~25 N
3. DURABILITY : 5,000 cycles
4. DIELECTRIC STRENGTH : 250V AC (UNMATED)
150V AC (MATED)
5. CONTACT RESISTANCE : 30 mΩ MAX
50 mΩ MAX(SHELL)
6. INSULATION RESISTANCE : 100 MΩ MIN (UNMATED)
10 MΩ MIN (MATED)
- 7.TEMPERATURE RANGE : -20°C ~ +85°C

Material:

- 1.Housing: High Temperature Thermal Plastics,UL 94V-0 , LCP
 - 2.Contact: Phosphor Bronze
 - 3.Shell: Brass / Spcc
- Finish:
- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall

RoHS Compliant

TOLERANCES ARE

Up to 5	±0.2
Above 5 ~ 15	±0.3
Above 15 ~ 30	±0.4
Above 30 ~ 50	±0.5
Angle	±0.3°

照片框

ORDER INFORMATION

MIHDMI-PE16-19-LF

SERIES | LEADFREE
19WAY
EDGE CLIP 1.6mm
MALE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

DESCRIPTION: HDMI D TYPE 公頭夾板式 板厚:1.6mm