







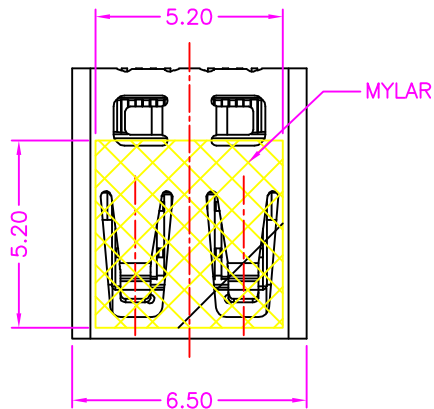


MATERIALS

HOUSING: LCP (UL 94V-0), BLACK
SHELL: COPPER ALLOY, NICKEL PLATING
TERMINAL: COPPER ALLOY, GOLD PLATED

SPECIFICATION

CURRENT RATING: 0.8 AMP MAX
DIELECTRIC WITHSTANDING: 250V AC FOR ONE MINUTE
CONTACT RESISTANCE: 10m OHMS MAX
INSULATION RESISTANCE: 100M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -40°C~+85°C

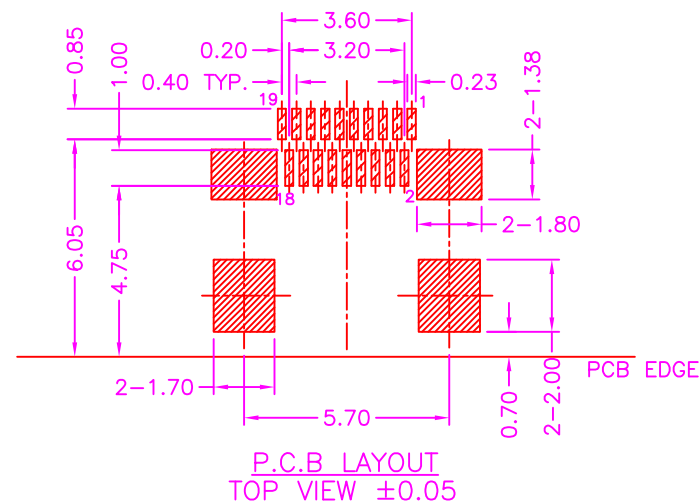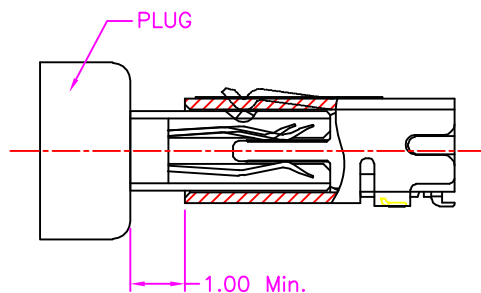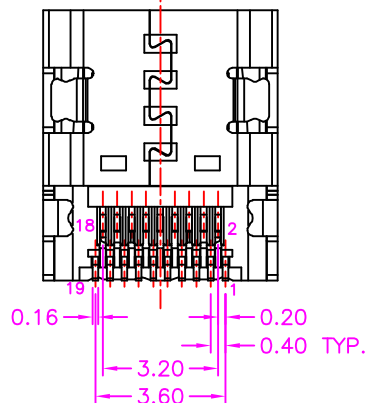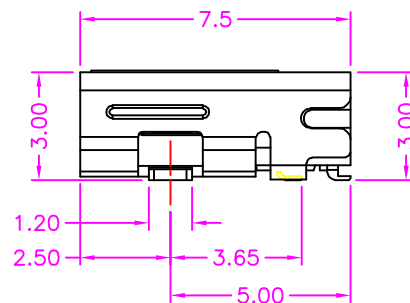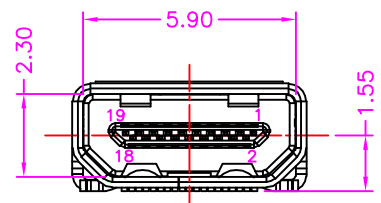

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

MIHDMI-SWEJC-19-LF
SERIES | LEADFREE
19WAY
FEMALE | EAR | TYPE
90°SMT

DESCRIPTION: MICRO HDMI, D TYPE, 0.40mm PITCH, PCB MOUNT, SMT, METAL SHIELD WITH MYLAR, FEMALE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.40

.X ± 0.30

.XX ± 0.20

.XXX ± 0.10

ANG ±

PPOJECTION