



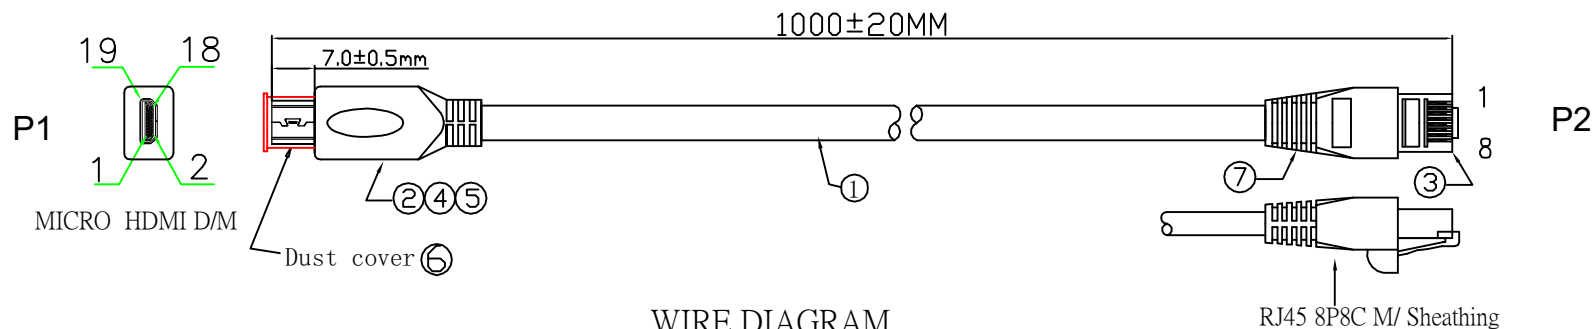


WIRE DIAGRAM

CONN.#1

CONN.#2

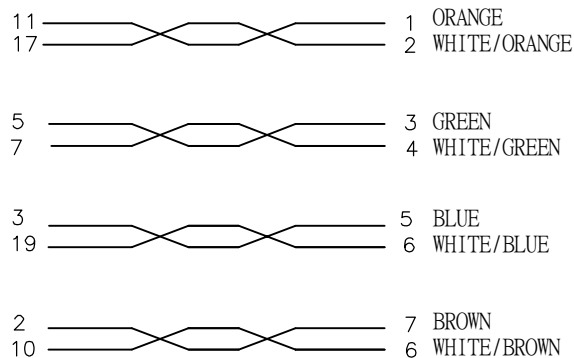

Packing method: single PCS thread.
Then pack the waterproof bag according
to the size of the outer case.

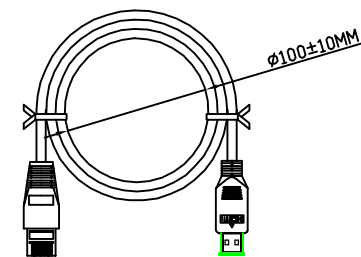

Test criteria:

1. 100% test (open circuit, open circuit, short circuit).
2. Conduction impedance: 5/max.
3. Insulation impedance: 10 M_/min.
4. Voltage: 300v/10ms

PART LIST: This product meets the "ROHS" environmental protection standard,
and all the materials used are equivalent products.

7	MOLDING EXTERIOR DIE : BLACK 80P PVC.		g
6	MICRO HDMI D TRANSPARENT DUST COVER.	1	PCS
5	MOLDING EXTERIOR DIE : BLACK PVC 45P.		g
4	PE INTIMA.		g
3	RJ45 8P8C CRYSTAL HEAD+SHELL F/G U'.	1	SET
2	MICRO HDMI D M 19P TERMINAL GOLD PLATING. BLACK RUBBER CORE . SHELL Nickel. WELDING WIRE TYPE.	1	SET
1	CABLE: CAT.5 UTP 26AWG*4P OD:5.5MM. JACK:BLACK	L	PCS
ITEM	STANDARD SPECIFICATION	Q' TY	UNIT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

照片框

ORDER INFORMATION

MIHRJ-190826C5-M1M-LF

SERIES

190826C5

M1M

LF

DESCRIPTION: MICRO HDMI D/M TO RJ45 8P8C JACKET TYPE HEAD CABLE L=1000MM

LEADFREE
1000mm
MALE TO MALE
CAT. 5
26 AWG
19 TO 08 WAY