
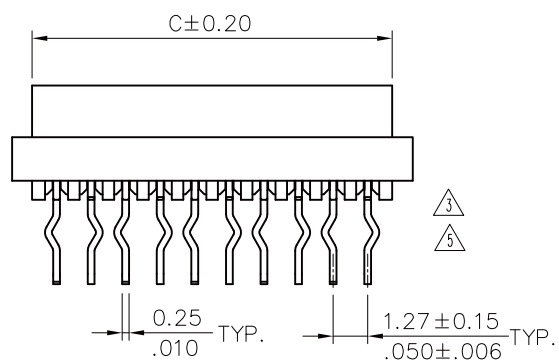
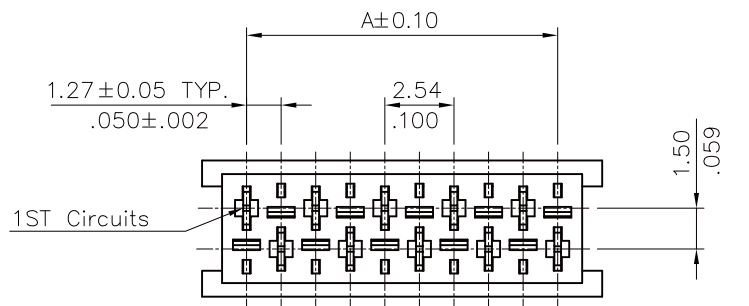


Material:

- * Insulation:
Glass Filled Polyester UL 94V-0
- * Contact: Phosphor Bronze

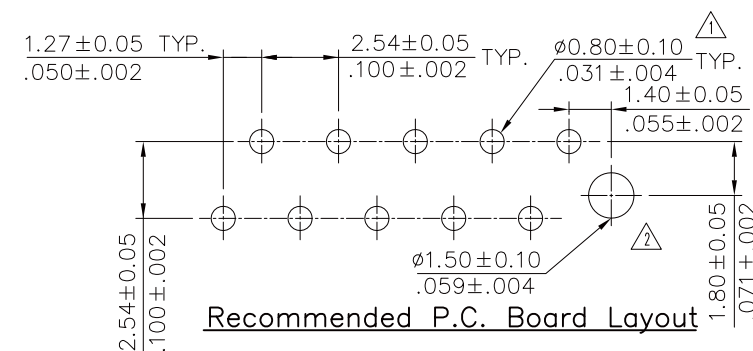

DIM.A= 1.27 x No. of Spaces
 DIM.B= DIM.A + 5.87
 DIM.C= DIM.A + 1.80
 DIM.D= DIM.A + 3.27
 *Available in 4 ~ 26 Circuits

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ± 0.10
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MIM-SD-xx-LF
 SERIES T LEADFREE
 04~26WAY
 DIP 180°
 FEMALE

DESCRIPTION: 1.27mm Pitch Female Top entry DIP Type Connector