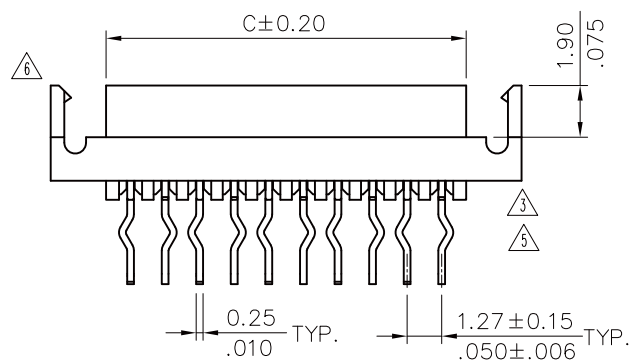
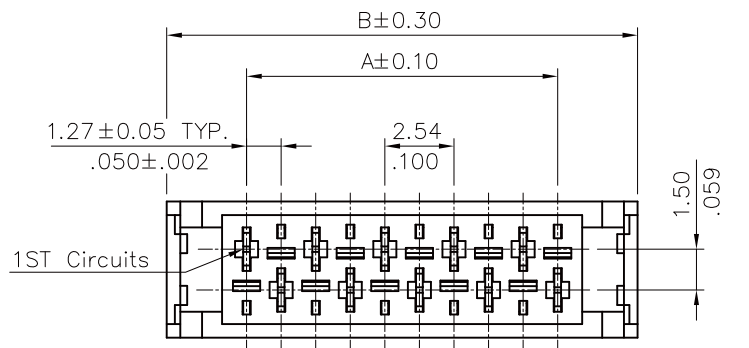


Material:

* Insulation:

Glass Filled Polyester UL 94V-0

* Contact: Phosphor Bronze


DIM.A= 1.27 x No. of Spaces

DIM.B= DIM.A + 5.87

DIM.C= DIM.A + 1.80

DIM.D= DIM.A + 3.27

*Available in 4 ~ 26 Circuits

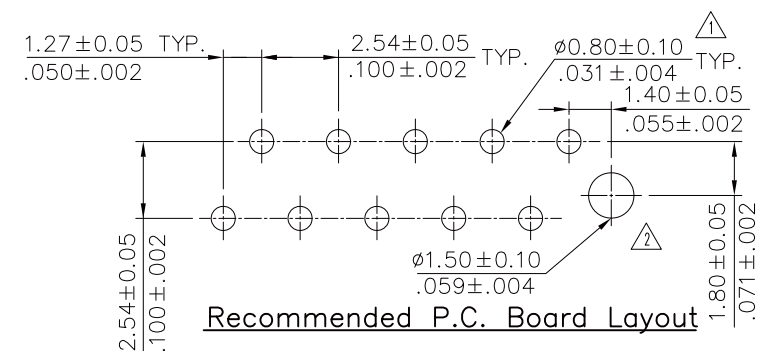

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$
X $\pm$ 0.30
XX $\pm$ 0.20
XXX $\pm$ 0.10
ANG $\pm$


PPOJECTION

照片框

ORDER INFORMATION

MIM-SDLR-xx-LF
SERIES
LEADFREE
04~26WAY
REEL
LOCK
DIP 180°
FEMALE

DESCRIPTION: 1.27mm Pitch Female Top entry DIP Type Connector

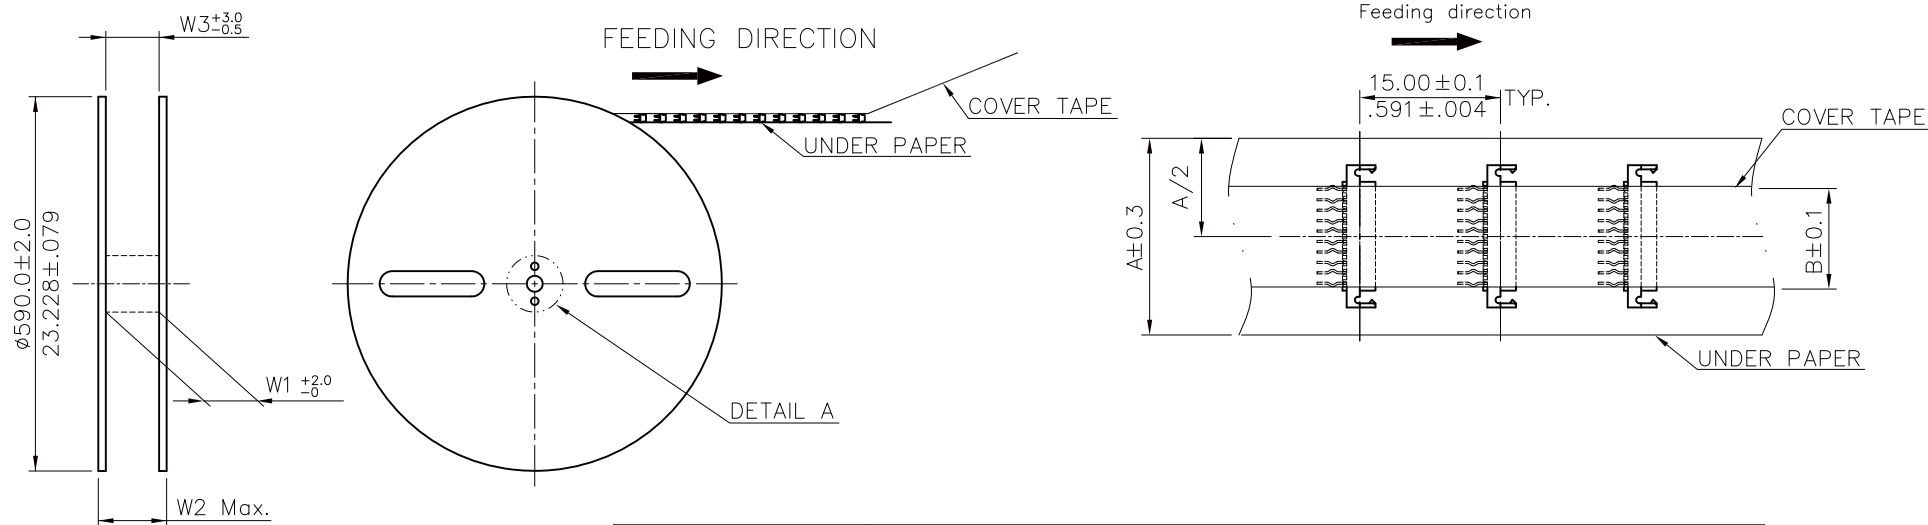

Circuits	Dimension				
	A	B	W1	W2	W3
4	11.0(.433)	6.0(.236)	13.0(.512)	23.0(.906)	13.0(.512)
6	17.0(.669)	6.0(.236)	18.0(.709)	28.0(1.102)	18.0(.709)
8	17.0(.669)	6.0(.236)	18.0(.709)	28.0(1.102)	18.0(.709)
10	21.0(.827)	6.0(.236)	22.0(.866)	32.0(1.260)	22.0(.866)
12	21.0(.827)	6.0(.236)	22.0(.866)	32.0(1.260)	22.0(.866)
14	24.0(.945)	6.0(.236)	25.0(.984)	35.0(1.378)	25.0(.984)
16	29.0(1.142)	6.0(.236)	30.0(1.181)	40.0(1.575)	30.0(1.181)
18	29.0(1.142)	6.0(.236)	30.0(1.181)	40.0(1.575)	30.0(1.181)
20	32.0(1.260)	6.0(.236)	33.0(1.299)	43.0(1.693)	33.0(1.299)
22	36.0(1.417)	6.0(.236)	37.0(1.457)	47.0(1.850)	37.0(1.457)
24	36.0(1.417)	6.0(.236)	37.0(1.457)	47.0(1.850)	37.0(1.457)
26	39.0(1.535)	6.0(.236)	40.0(1.575)	50.0(1.969)	40.0(1.575)

* Quantity : 2500 PCS/Reel/Caton

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MIM-SDLR-xx-LF
SERIES T T T T LEADFREE
04~26WAY
REEL
LOCK
DIP 180°
FEMALE

DESCRIPTION: 1.27mm Pitch Female Top entry DIP Type Connector